




Microwave / RF Products

Connector

About Hermercs

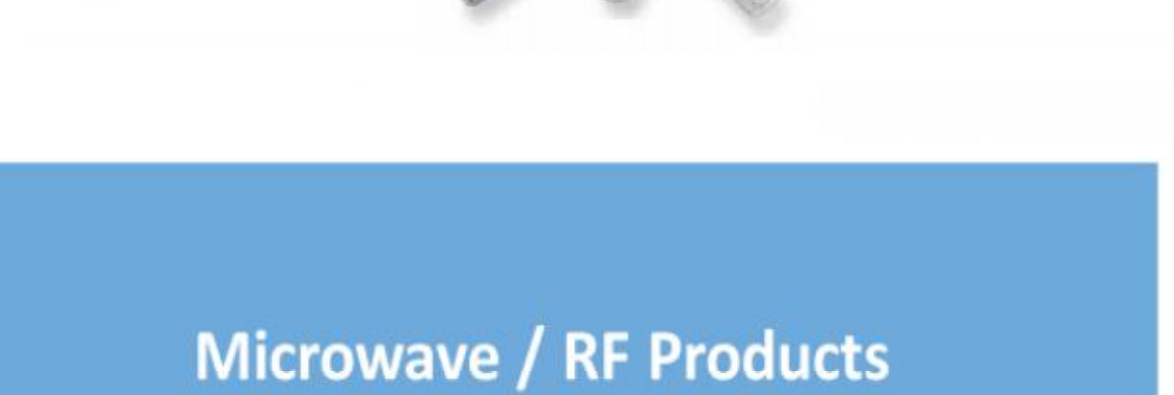

Based on material as the ferrite and ceramics, Hermercs developed a product chain from components to sub systems and integrated systems, which widely recognized from Satcom, Microwave, Test and Measurements and applications.

After decade of focusing on the dedicated category, Hermercs win a reputation within the industry from some global leading companies and also by conducting the modern management systems as the ISO9001/ISO14001, cloud manufacturing, Hermercs brings cutting-edge technology to provide innovative solutions as the reliable open partner for cooperation. All Hermercs commercial parts comply with the RoHS and Reach requirements. Hermercs keeps big investment for design and research, from basic materials to applications, and holds many patents and IPR from materials to components to systems, from hardware to software.

For Satcom industry, Hermercs is very proud to offer the solution from ground station to aerospace parts and from components to testing systems as the combining networks, switching networks and double ridge waveguide networks. For microwave communication industry, we are more focusing on the mobile backhaul market, from longhaul to shorthaul and smallcell applications.



For the testing and measurements industry, Hermercs developed the product line up to 110GHz as the calibration kits, testing accessories and general/customized testing systems, and for future vision, all general systems are cloud based. for the filter industry and also, some absorbers for the waveguide components applications.

Hermercs


Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Fax: +86-25-85569295

Web Site: www.hermercs.com

E-mail: sales@hermercs.com

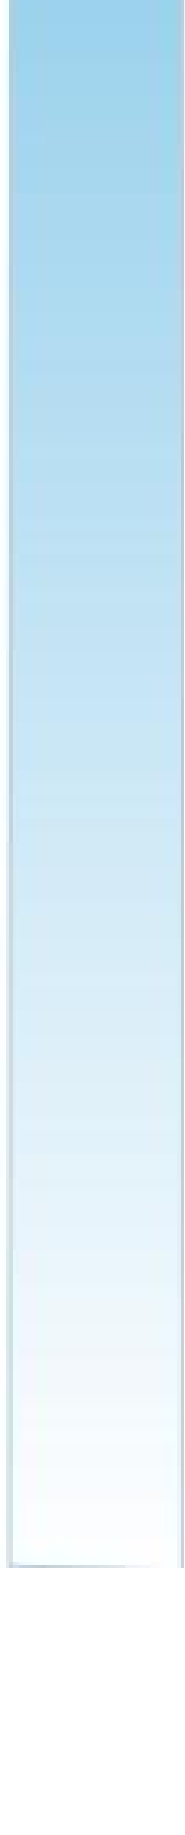


INDEX

SMA Connector	1
SSMA Connector	24
N Connector	29
2.4mm Connector	34
2.92mm Connector	42

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0101

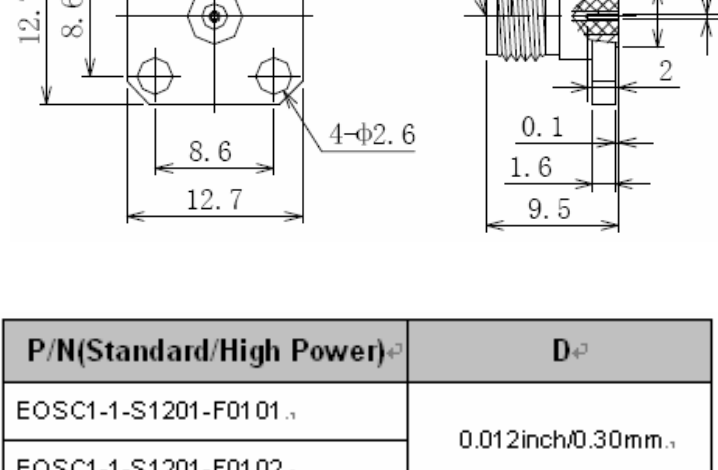

18GHz-27GHz		1.15:1 (Max)
Maximum Power Handling:		
Standard Model	High Power Model	
150W at 125℃	250W at 125℃	
		160W at 165℃
Durability: 500 Cycles		
Operating Temperature:		
-50℃~+125℃	Standard Model	
-60℃~+165℃	High Power Model	
Interfaces: PER MIL-STD-348A		

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center

Tel: 86-25-85490880 Fax: +86-25-

Web Site: www.hermercs.com E-mail: sales@

P/N(Standard/High Power)①	D②
EOSC1-1-S1201-F0101 ③	0.012inch/0.30mm ④
EOSC1-1-S1201-F0102 ⑤	
EOSC1-1-S1501-F0101 ⑥	0.015inch/0.38mm ④
EOSC1-1-S1501-F0102 ⑤	
EOSC1-1-S1801-F0101 ⑥	0.018inch/0.46mm ④
EOSC1-1-S1801-F0102 ⑤	
EOSC1-1-S2001-F0101 ⑥	0.020inch/0.51mm ④
EOSC1-1-S2001-F0102 ⑤	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880


Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0201

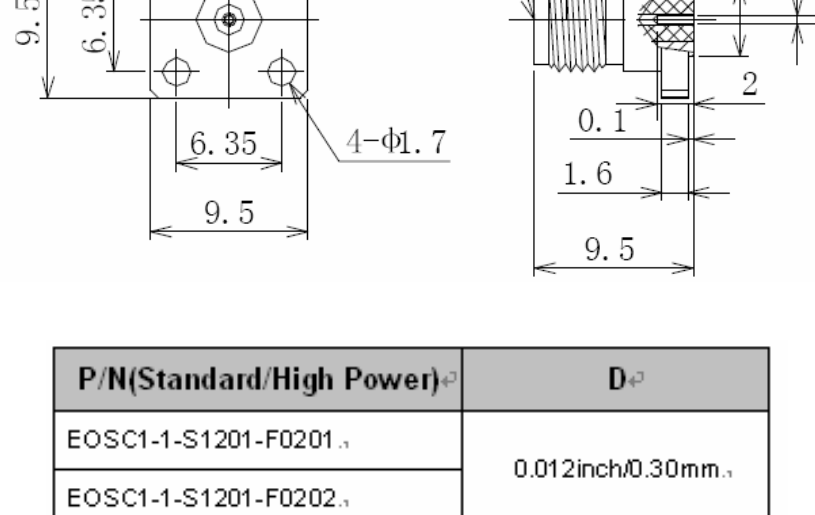

Maximum Power Handling:	
Standard Model	High Power Model
150W at 125℃	250W at 125℃
160W at 165℃	
Durability: 500 Cycles	
Operating Temperature:	
-50℃~+125℃	Standard Model
-60℃~+165℃	High Power Model
Interfaces: PER MIL-STD-348A	

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@


P/N(Standard/High Power)	D
EOSC1-1-S1201-F0201	0.012inch0.30mm
EOSC1-1-S1201-F0202	
EOSC1-1-S1501-F0201	0.015inch0.38mm
EOSC1-1-S1501-F0202	
EOSC1-1-S1801-F0201	0.018inch0.46mm
EOSC1-1-S1801-F0202	
EOSC1-1-S2001-F0201	0.020inch0.51mm
EOSC1-1-S2001-F0202	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0301

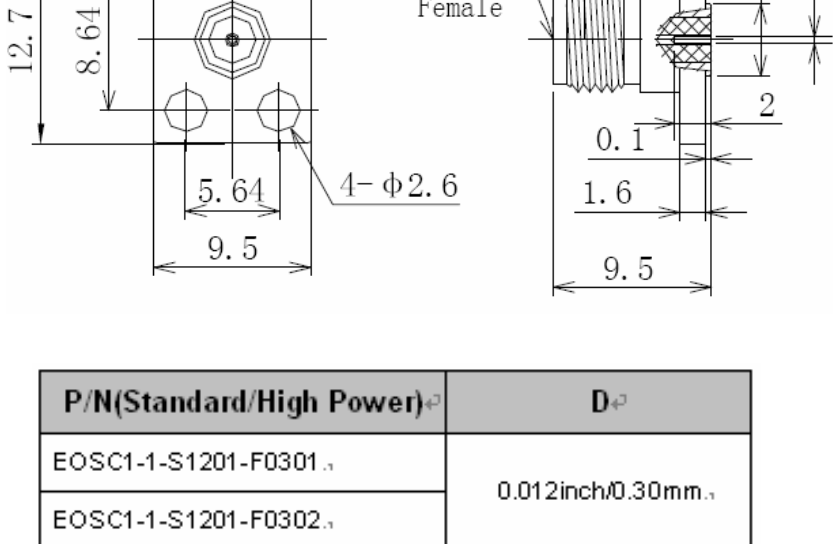

Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
165℃		160W at	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermecs

Add: 2th Floor, Building 8, Jingang Pioneering Center

Tel: 86-25-85490880 Fax: +86-25-

Web Site: www.hermecs.com E-mail: sales@

P/N(Standard/High Power) ^①	D ^②
EOSC1-1-S1201-F0301	0.012inch/0.30mm
EOSC1-1-S1201-F0302	
EOSC1-1-S1501-F0301	0.015inch/0.38mm
EOSC1-1-S1501-F0302	
EOSC1-1-S1801-F0301	0.018inch/0.46mm
EOSC1-1-S1801-F0302	
EOSC1-1-S2001-F0301	0.020inch/0.51mm
EOSC1-1-S2001-F0302	


Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Connector

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0401

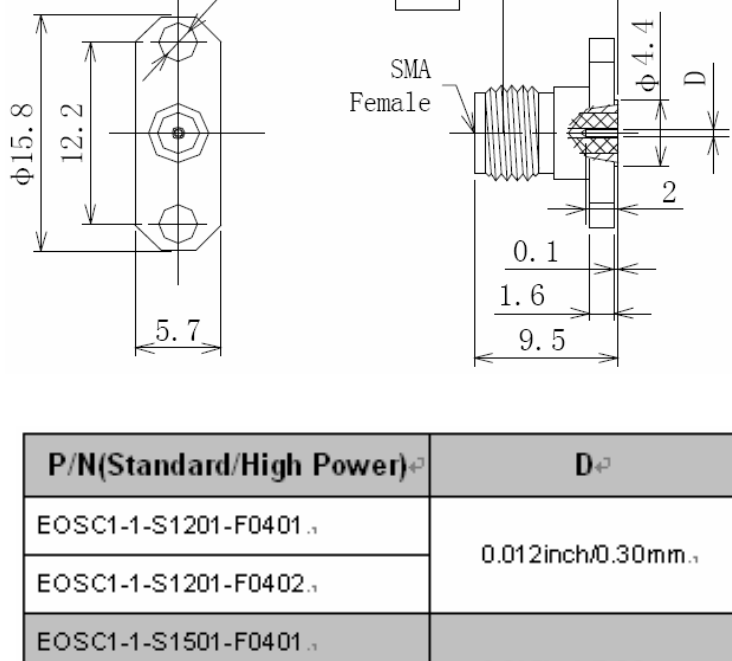

Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
		160W at 165℃	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@

P/N(Standard/High Power)ⓘ	Dⓘ
EOSC1-1-S1201-F0401 ⓘ	0.012inch/0.30mm ⓘ
EOSC1-1-S1201-F0402 ⓘ	
EOSC1-1-S1501-F0401 ⓘ	0.015inch/0.38mm ⓘ
EOSC1-1-S1501-F0402 ⓘ	
EOSC1-1-S1801-F0401 ⓘ	0.018inch/0.46mm ⓘ
EOSC1-1-S1801-F0402 ⓘ	
EOSC1-1-S2001-F0401 ⓘ	0.020inch/0.51mm ⓘ
EOSC1-1-S2001-F0402 ⓘ	

Materials/Finishes:

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Connector

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0501

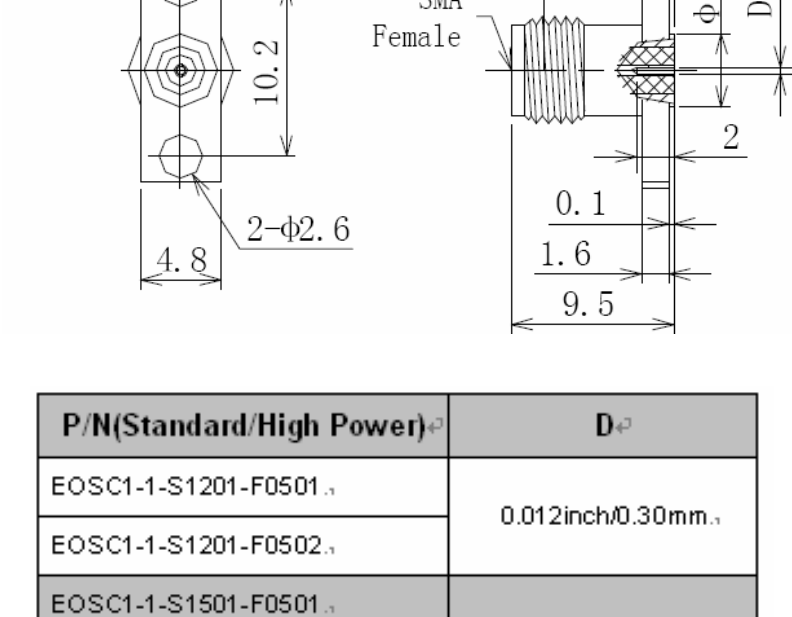

Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
		160W at 165℃	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@


P/N(Standard/High Power)Ⓜ	DⓂ
EOSC1-1-S1201-F0501 Ⓜ	0.012inch/0.30mm Ⓜ
EOSC1-1-S1201-F0502 Ⓜ	
EOSC1-1-S1501-F0501 Ⓜ	0.015inch/0.38mm Ⓜ
EOSC1-1-S1501-F0502 Ⓜ	
EOSC1-1-S1801-F0501 Ⓜ	0.018inch/0.46mm Ⓜ
EOSC1-1-S1801-F0502 Ⓜ	
EOSC1-1-S2001-F0501 Ⓜ	0.020inch/0.51mm Ⓜ
EOSC1-1-S2001-F0502 Ⓜ	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0601

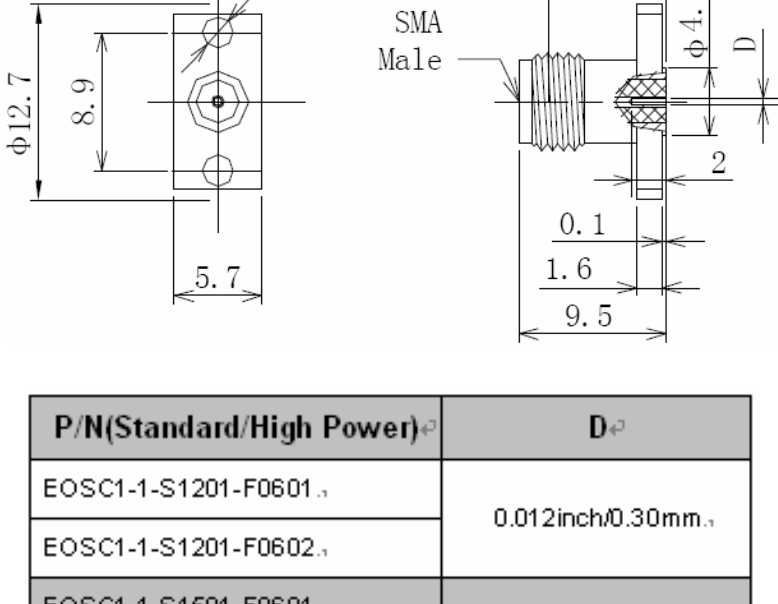

Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
165℃		160W at	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@



P/N(Standard/High Power) ^①	D ^②
EOSC1-1-S1201-F0601 ₁	0.012inch/0.30mm ₁
EOSC1-1-S1201-F0602 ₁	
EOSC1-1-S1501-F0601 ₁	0.015inch/0.38mm ₁
EOSC1-1-S1501-F0602 ₁	
EOSC1-1-S1801-F0601 ₁	0.018inch/0.46mm ₁
EOSC1-1-S1801-F0602 ₁	
EOSC1-1-S2001-F0601 ₁	0.020inch/0.51mm ₁
EOSC1-1-S2001-F0602 ₁	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermerscs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermerscs.com E-mail: sales@hermerscs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1201-F0701

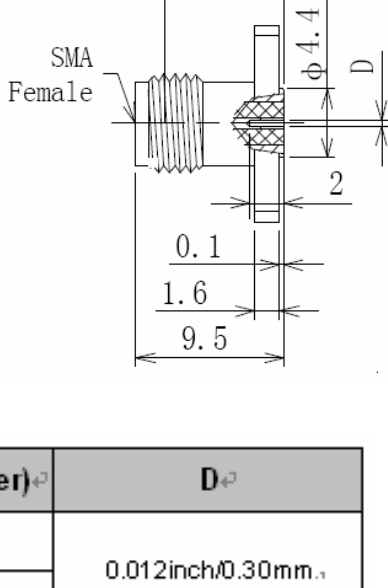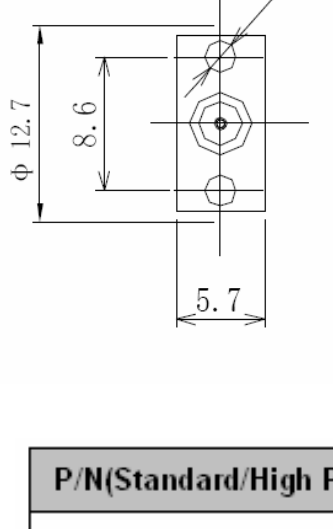

18GHz-27GHz			1.15:1
(Max)			
Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
165℃		160W at	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			
Hermers			
Add: 2th Floor, Building 8, Jingang Pioneering Center			
Tel: 86-25-85490880		Fax: +86-25-	
Web Site: www.hermers.com		E-mail: sales@	


P/N(Standard/High Power) ①	D ②
EOSC1-1-S1201-F0701 ③	0.012inch/0.30mm ④
EOSC1-1-S1201-F0702 ③	
EOSC1-1-S1501-F0701 ③	0.015inch/0.38mm ④
EOSC1-1-S1501-F0702 ③	
EOSC1-1-S1801-F0701 ③	0.018inch/0.46mm ④
EOSC1-1-S1801-F0702 ③	
EOSC1-1-S2001-F0701 ③	0.020inch/0.51mm ④
EOSC1-1-S2001-F0702 ③	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermerscs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermerscs.com E-mail: sales@hermerscs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1202-F0101

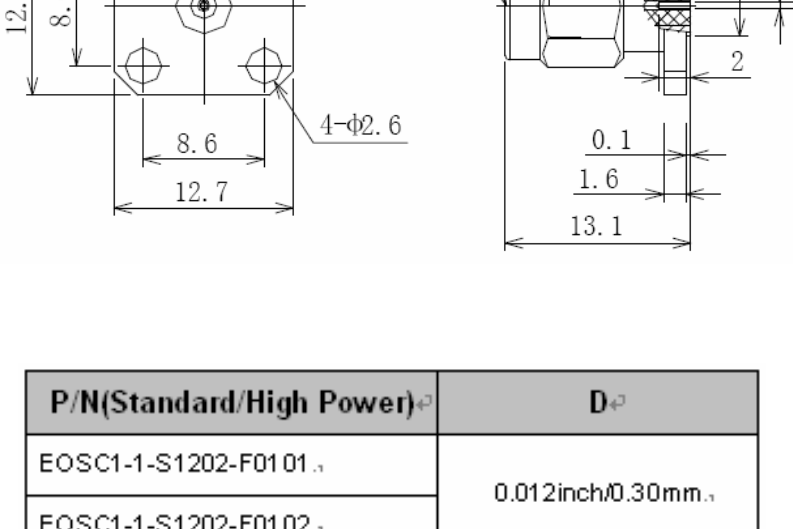

Performance Features			
Nominal Impedance: 50Ω			
Frequency Range: DC-27GHz			
VSWR:	DC-18GHz	1.10:1 (Max)	
	18GHz-27GHz	1.15:1 (Max)	
Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
165℃		160W at	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@


P/N(Standard/High Power) ^①	D ^②
EOSC1-1-S1202-F0101 ₁	0.012inch/0.30mm ₁
EOSC1-1-S1202-F0102 ₁	
EOSC1-1-S1502-F0101 ₁	0.015inch/0.38mm ₁
EOSC1-1-S1502-F0102 ₁	
EOSC1-1-S1802-F0101 ₁	0.018inch/0.46mm ₁
EOSC1-1-S1802-F0102 ₁	
EOSC1-1-S2002-F0101 ₁	0.020inch/0.51mm ₁
EOSC1-1-S2002-F0102 ₁	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1202-F0201

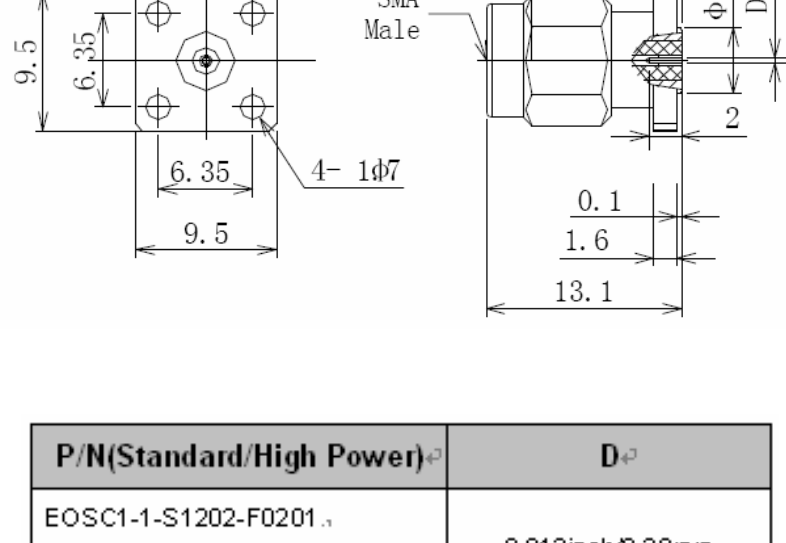

(Max)			18GHz-27GHz	1.15:1
Maximum Power Handling:				
Standard Model		High Power Model		
150W at 125℃		250W at 125℃		
		160W at 165℃		
Durability: 500 Cycles				
Operating Temperature:				
-50℃~+125℃		Standard Model		
-60℃~+165℃		High Power Model		
Interfaces: PER MIL-STD-348A				

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@


P/N(Standard/High Power)ⓘ	Dⓘ
EOSC1-1-S1202-F0201 ⓘ	0.012inch/0.30mm ⓘ
EOSC1-1-S1202-F0202 ⓘ	
EOSC1-1-S1502-F0201 ⓘ	0.015inch/0.38mm ⓘ
EOSC1-1-S1502-F0202 ⓘ	
EOSC1-1-S1802-F0201 ⓘ	0.018inch/0.46mm ⓘ
EOSC1-1-S1802-F0202 ⓘ	
EOSC1-1-S2002-F0201 ⓘ	0.020inch/0.51mm ⓘ
EOSC1-1-S2002-F0202 ⓘ	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermerc
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermerc.com E-mail: sales@hermerc.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1202-F0301

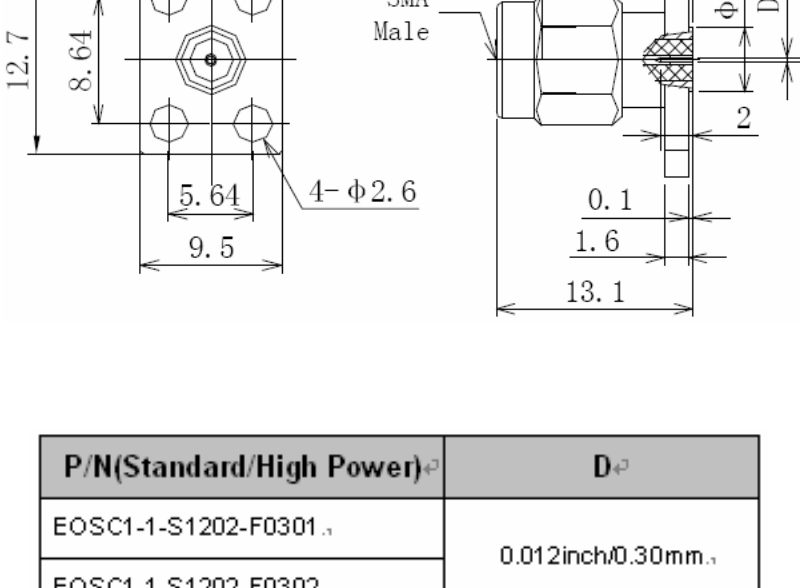

Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
165℃		160W at	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@



P/N(Standard/High Power)□	D□
EOSC1-1-S1202-F0301□	0.012inch/0.30mm□
EOSC1-1-S1202-F0302□	
EOSC1-1-S1502-F0301□	0.015inch/0.38mm□
EOSC1-1-S1502-F0302□	
EOSC1-1-S1802-F0301□	0.018inch/0.46mm□
EOSC1-1-S1802-F0302□	
EOSC1-1-S2002-F0301□	0.020inch/0.51mm□
EOSC1-1-S2002-F0302□	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1202-F0401

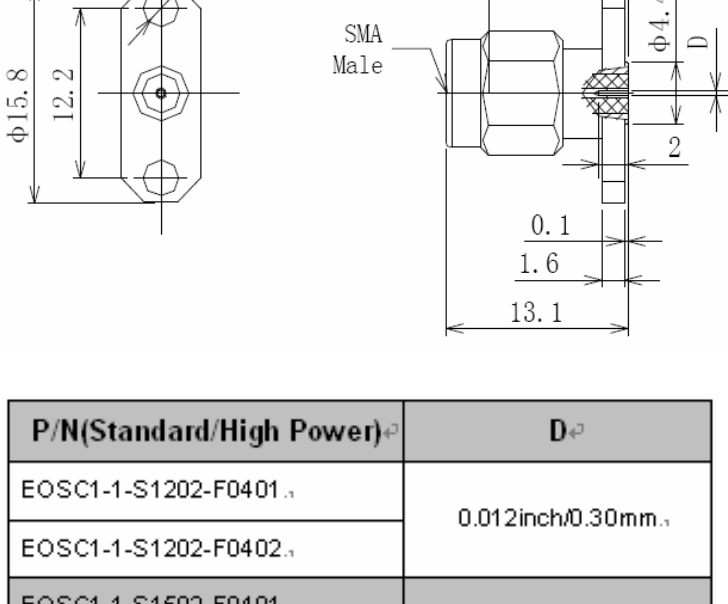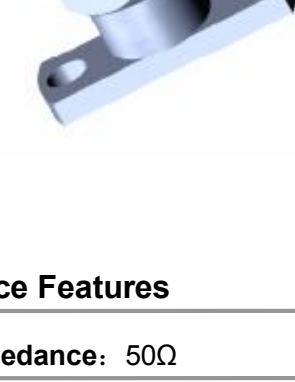

Maximum Power Handling:			
Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
		160W at 165℃	
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercs.com E-mail: sales@


P/N(Standard/High Power) ^①	D ^②
EOSC1-1-S1202-F0401 ₁	0.012inch/0.30mm ₁
EOSC1-1-S1202-F0402 ₁	
EOSC1-1-S1502-F0401 ₁	0.015inch/0.38mm ₁
EOSC1-1-S1502-F0402 ₁	
EOSC1-1-S1802-F0401 ₁	0.018inch/0.46mm ₁
EOSC1-1-S1802-F0402 ₁	
EOSC1-1-S2002-F0401 ₁	0.020inch/0.51mm ₁
EOSC1-1-S2002-F0402 ₁	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermerc
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermerc.com E-mail: sales@hermerc.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1202-F0501

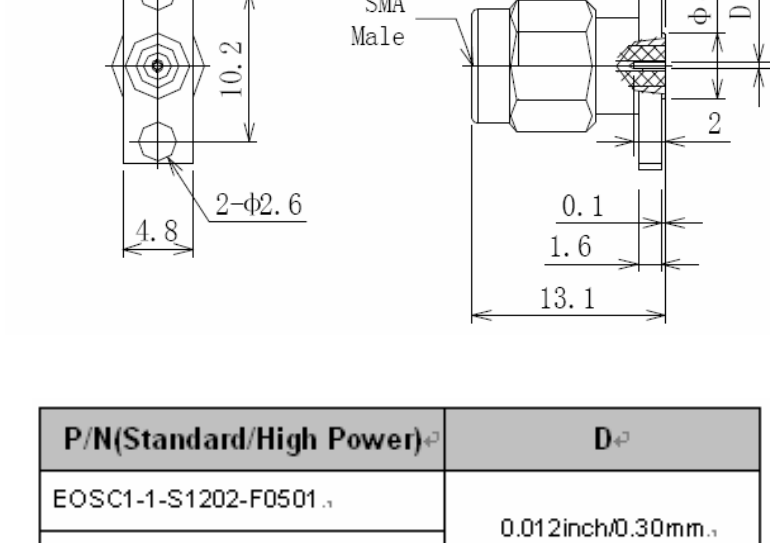

18GHz-27GHz				1.15:1 (Max)	
Maximum Power Handling:					
Standard Model		High Power Model			
150W at 125℃		250W at 125℃			
		160W at 165℃			
Durability: 500 Cycles					
Operating Temperature:					
-50℃~+125℃		Standard Model			
-60℃~+165℃		High Power Model			
Interfaces: PER MIL-STD-348A					
Hermercs					
Add: 2th Floor, Building 8, Jingang Pioneering Center					
Tel: 86-25-85490880			Fax: +86-25-		
Web Site: www.hermercs.com			E-mail: sales@		


P/N(Standard/High Power)Ⓐ	DⒶ
EOSC1-1-S1202-F0501 ,	0.012inch/0.30mm ,
EOSC1-1-S1202-F0502 ,	
EOSC1-1-S1502-F0501 ,	0.015inch/0.38mm ,
EOSC1-1-S1502-F0502 ,	
EOSC1-1-S1802-F0501 ,	0.018inch/0.46mm ,
EOSC1-1-S1802-F0502 ,	
EOSC1-1-S2002-F0501 ,	0.020inch/0.51mm ,
EOSC1-1-S2002-F0502 ,	

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Series Field Replaceable Flange Connectors

P/N: EOSC1-1-S1202-F0601

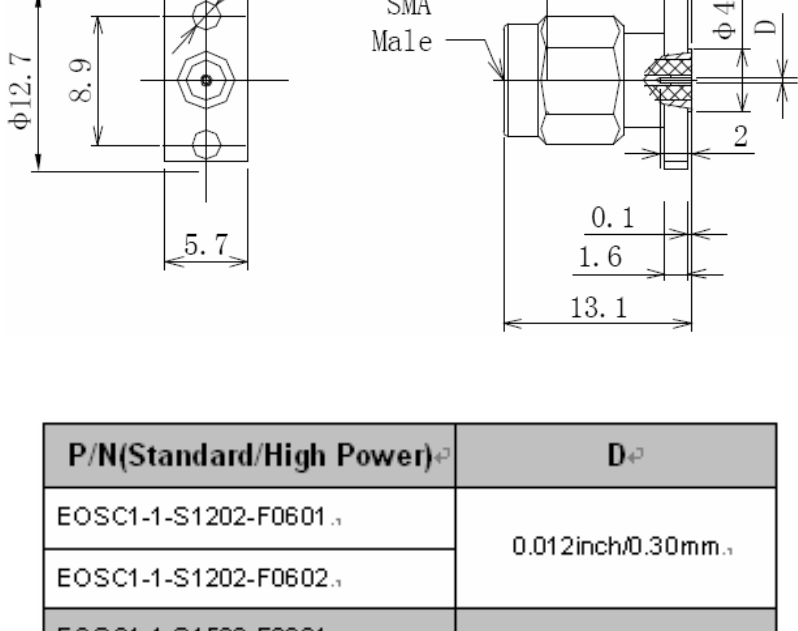


Standard Model		High Power Model	
150W at 125℃		250W at 125℃	
165℃			160W at
Durability: 500 Cycles			
Operating Temperature:			
-50℃~+125℃		Standard Model	
-60℃~+165℃		High Power Model	
Interfaces: PER MIL-STD-348A			
Hermecs			
Add: 2th Floor, Building 8, Jingang Pioneering Center		Tel: +86-25-	
Tel: 86-25-85490880		Fax: +86-25-	
Web Site: www.hermecs.com		E-mail: sales@	

P/N(Standard/High Power)Ⓐ	DⒶ
EOSC1-1-S1202-F0601.Ⓜ	0.012inch/0.30mm.Ⓜ
EOSC1-1-S1202-F0602.Ⓜ	
EOSC1-1-S1502-F0601.Ⓜ	0.015inch/0.38mm.Ⓜ
EOSC1-1-S1502-F0602.Ⓜ	
EOSC1-1-S1802-F0601.Ⓜ	0.018inch/0.46mm.Ⓜ
EOSC1-1-S1802-F0602.Ⓜ	
EOSC1-1-S2002-F0601.Ⓜ	0.020inch/0.51mm.Ⓜ
EOSC1-1-S2002-F0602.Ⓜ	

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermercs.com E-mail: sales@hermercs.com

SMA Series Field Replaceable Tread-in Connectors

P/N: EOSC1-1-S1201-T0101

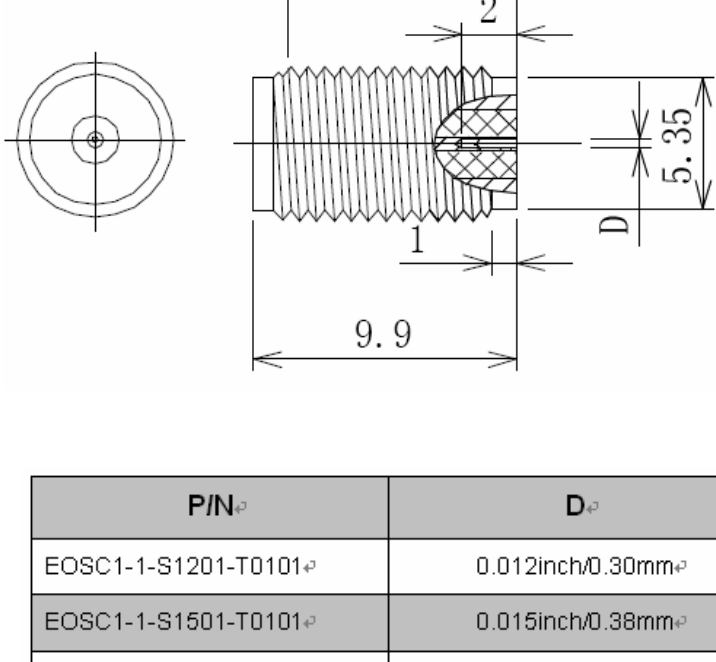

Operating Temperature: -50℃~+125℃			
Interfaces: PER MIL-STD-348A			


Nanjing Hermerc Telecom Technologies Co.,Ltd.
Add: 2th Floor, Building 8, Jingang Pioneering Center
Tel: 86-25-85490880 Fax: +86-25-
Web Site: www.hermercsc.com E-mail: sales@

P/N ^①	D ^②
EOSC1-1-S1201-T0101 ^③	0.012inch/0.30mm ^④
EOSC1-1-S1501-T0101 ^③	0.015inch/0.38mm ^④
EOSC1-1-S1801-T0101 ^③	0.018inch/0.46mm ^④
EOSC1-1-S2001-T0101 ^③	0.020inch/0.51mm ^④

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

SMA Series Field Replaceable Tread-in Connectors

P/N: EOSC1-1-S1201-T0101

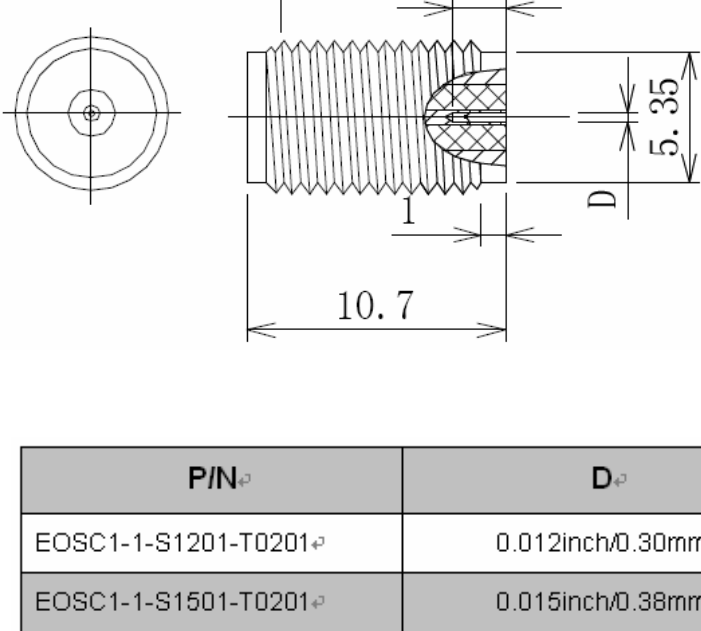


Performance Features			
Nominal Impedance: 50Ω			
Frequency Range: DC-27GHz			
VSWR:	DC-18GHz	1.10:1 (Max)	
	18GHz-27GHz	1.15:1 (Max)	
Durability: 500 Cycles			
Operating Temperature: -50℃~+125℃			
Interfaces: PER MIL-STD-348A			

PIN ^①	D ^②
EOSC1-1-S1201-T0201 ^③	0.012inch/0.30mm ^④
EOSC1-1-S1501-T0201 ^③	0.015inch/0.38mm ^④
EOSC1-1-S1801-T0201 ^③	0.018inch/0.46mm ^④
EOSC1-1-S2001-T0201 ^③	0.020inch/0.51mm ^④

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PTFE

SMA Series Field Bulkhead Flange Connectors

P/N: EOSC1-1-M0101-F0101

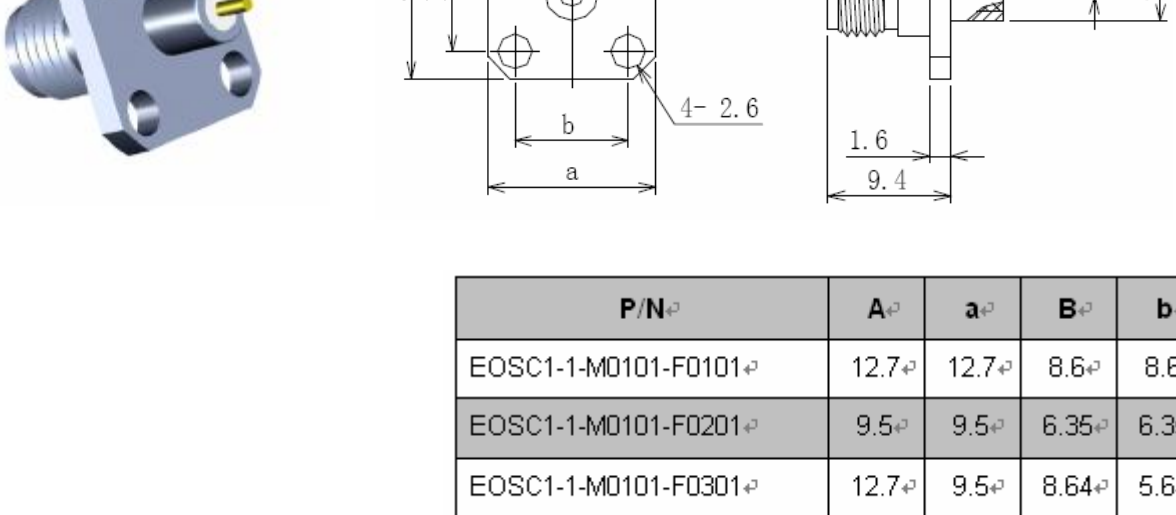

P/N ^①	A ^②	a ^②	B ^③	b ^③
EOSC1-1-M0101-F0101 ^④	12.7 ^②	12.7 ^②	8.6 ^③	8.6 ^③
EOSC1-1-M0101-F0201 ^④	9.5 ^②	9.5 ^②	6.35 ^③	6.35 ^③
EOSC1-1-M0101-F0301 ^④	12.7 ^②	9.5 ^②	8.64 ^③	5.64 ^③

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-27GHz

Durability: 500 Cycles

Operating Temperature: -50℃~+125℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PTFE&PEI

SMA Series Field Bulkhead Flange Connectors

P/N: EOSC1-1-M0101-F0401

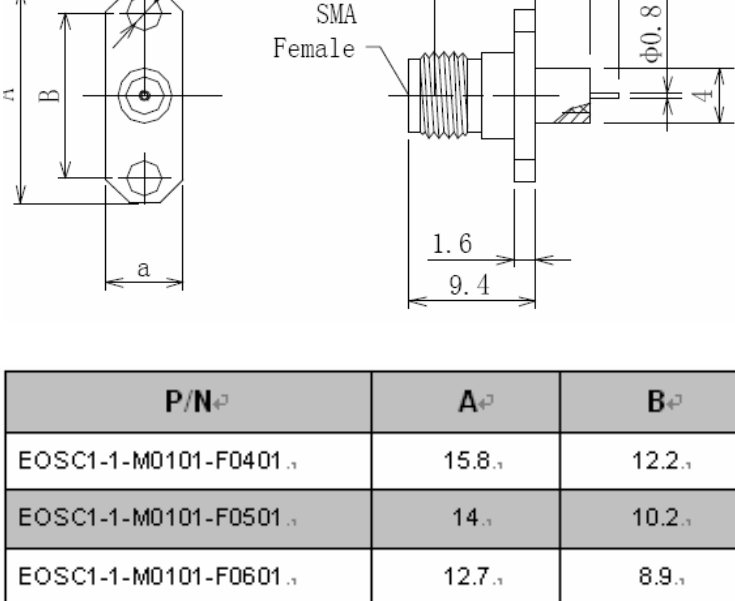


P/N ^①	A ^②	B ^③
EOSC1-1-M0101-F0401 ^④	15.8 ^⑤	12.2 ^⑥
EOSC1-1-M0101-F0501 ^④	14 ^⑤	10.2 ^⑥
EOSC1-1-M0101-F0601 ^④	12.7 ^⑤	8.9 ^⑥
EOSC1-1-M0101-F0701 ^④	12.7 ^⑤	8.6 ^⑥

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-27GHz	Center Contact: Beryllium Copper Plated Gold
Durability: 500 Cycles	Insulators: PTFE&PEI
Operating Temperature: -50℃~+125℃	
Interfaces: PER MIL-STD-348A	

SMA Series Field Bulkhead Flange Connectors

P/N: EOSC1-1-M0201-F0101

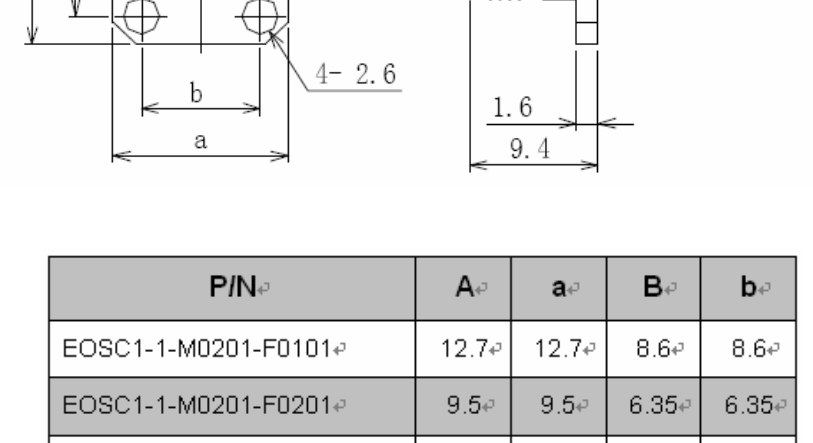


P/N ^①	A ^②	a ^③	B ^④	b ^⑤
EOSC1-1-M0201-F0101 ^①	12.7 ^②	12.7 ^②	8.6 ^③	8.6 ^③
EOSC1-1-M0201-F0201 ^①	9.5 ^②	9.5 ^②	6.35 ^③	6.35 ^③
EOSC1-1-M0201-F0301 ^①	12.7 ^②	9.5 ^②	8.64 ^③	5.64 ^③

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-27GHz	Center Contact: Beryllium Copper Plated Gold
Durability: 500 Cycles	Insulators: PTFE&PEI
Operating Temperature: -50℃~+125℃	
Interfaces: PER MIL-STD-348A	

SMA Series Field Bulkhead Flange Connectors

P/N: EOSC1-1-M0201-F0401

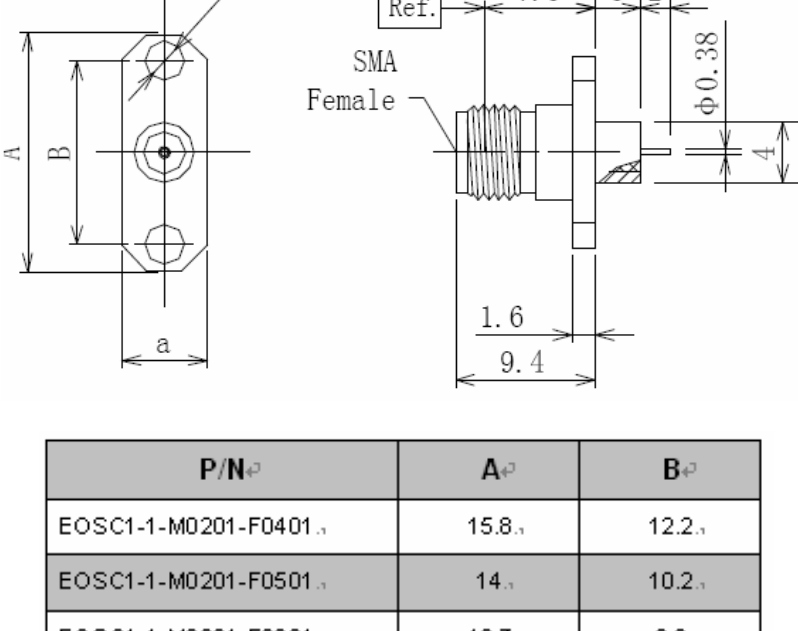


P/N ^①	A ^②	B ^③
EOSC1-1-M0201-F0401 ^④	15.8 ^⑤	12.2 ^⑥
EOSC1-1-M0201-F0501 ^④	14 ^⑤	10.2 ^⑥
EOSC1-1-M0201-F0601 ^④	12.7 ^⑤	8.9 ^⑥
EOSC1-1-M0201-F0701 ^④	12.7 ^⑤	8.6 ^⑥

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-27GHz	Center Contact: Beryllium Copper Plated Gold
Durability: 500 Cycles	Insulators: PTFE&PEI
Operating Temperature: -50℃~+125℃	
Interfaces: PER MIL-STD-348A	

SMA Series Field Bulkhead Flange Connectors

P/N: EOSC1-1-P1101-F0401

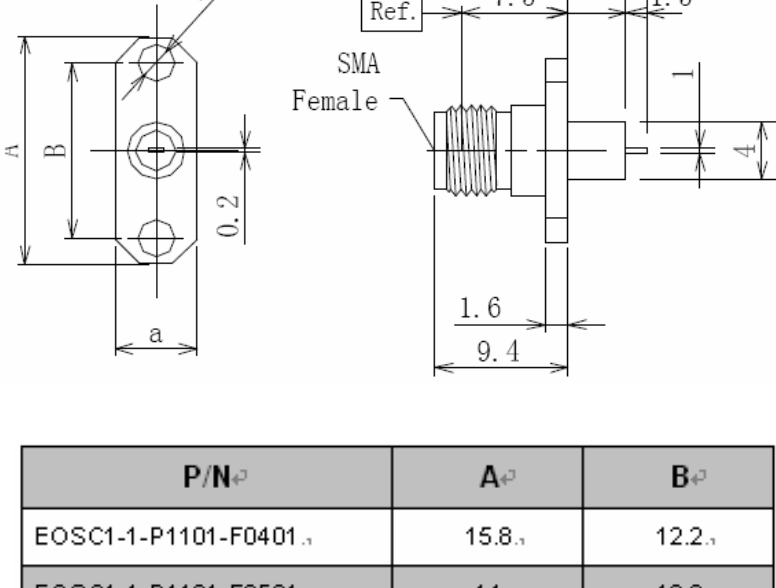


P/N ^①	A ^②	B ^②
EOSC1-1-P1101-F0401 ₁	15.8 ₁	12.2 ₁
EOSC1-1-P1101-F0501 ₁	14 ₁	10.2 ₁
EOSC1-1-P1101-F0601 ₁	12.7 ₁	8.9 ₁
EOSC1-1-P1101-F0701 ₁	12.7 ₁	8.6 ₁

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-27GHz	Center Contact: Beryllium Copper Plated Gold
Durability: 500 Cycles	Insulators: PTFE&PEI
Operating Temperature: -50℃~+125℃	
Interfaces: PER MIL-STD-348A	

SMA Series Field Bulkhead Flange Connectors

P/N: EOSC1-1-P1201-F0101

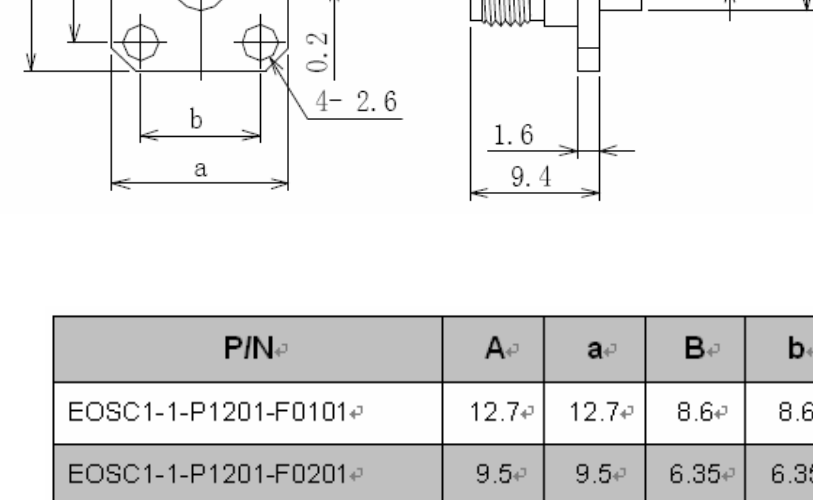

P/N ^①	A ^②	a ^③	B ^④	b ^⑤
EOSC1-1-P1201-F0101 ^①	12.7 ^②	12.7 ^③	8.6 ^④	8.6 ^⑤
EOSC1-1-P1201-F0201 ^①	9.5 ^②	9.5 ^③	6.35 ^④	6.35 ^⑤
EOSC1-1-P1201-F0301 ^①	12.7 ^②	9.5 ^③	8.64 ^④	5.64 ^⑤

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-27GHz

Durability: 500 Cycles

Operating Temperature: -50℃~+125℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PTFE&PEI

SMA Series Field Bulkhead Flange Connectors


P/N: EOSC1-1-P1201-F0401

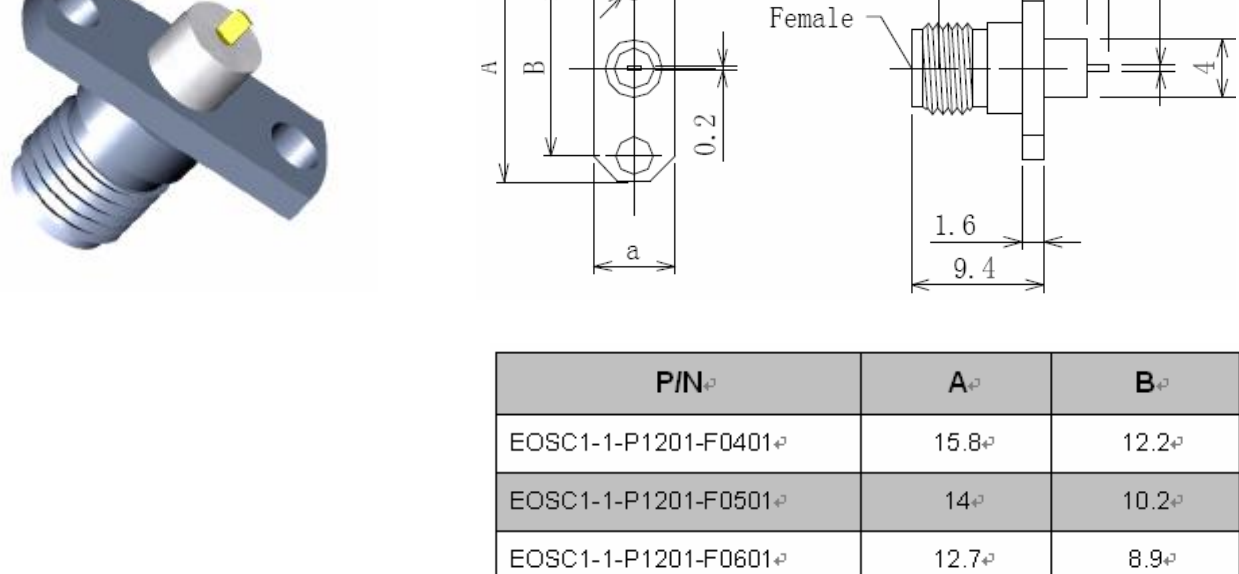

P/N ¹⁾	A ²⁾	B ³⁾
EOSC1-1-P1201-F0401 ⁴⁾	15.8 ⁵⁾	12.2 ⁶⁾
EOSC1-1-P1201-F0501 ⁴⁾	14 ⁵⁾	10.2 ⁶⁾
EOSC1-1-P1201-F0601 ⁴⁾	12.7 ⁵⁾	8.9 ⁶⁾
EOSC1-1-P1201-F0701 ⁴⁾	12.7 ⁵⁾	8.6 ⁶⁾

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-27GHz	Center Contact: Beryllium Copper Plated Gold
Durability: 500 Cycles	Insulators: PTFE&PEI
Operating Temperature: -50℃~+125℃	
Interfaces: PER MIL-STD-348A	

P/N: EOSC1-2-S1201-F0201

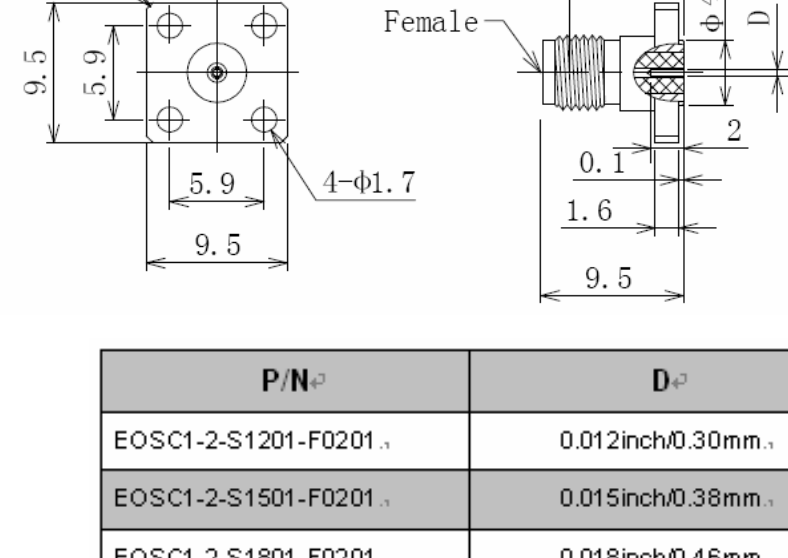

EOSC1-2-S2001-F0201	0.020inch/0.51mm
---------------------	------------------

Materials/Finishes:

Housing: Type 303 Stainless Steel - Polished & Passivate

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

Operating Temperature:


Interfaces: PER MIL-STD-3

Hemrercs
Add: 2th Floor, Building 8
Tel: 86 25 85400880

Web Site: www.hermercs.com

SSMA Series Field Replaceable Flange Connectors

P/N: EOSC1-2-S1201-F0301

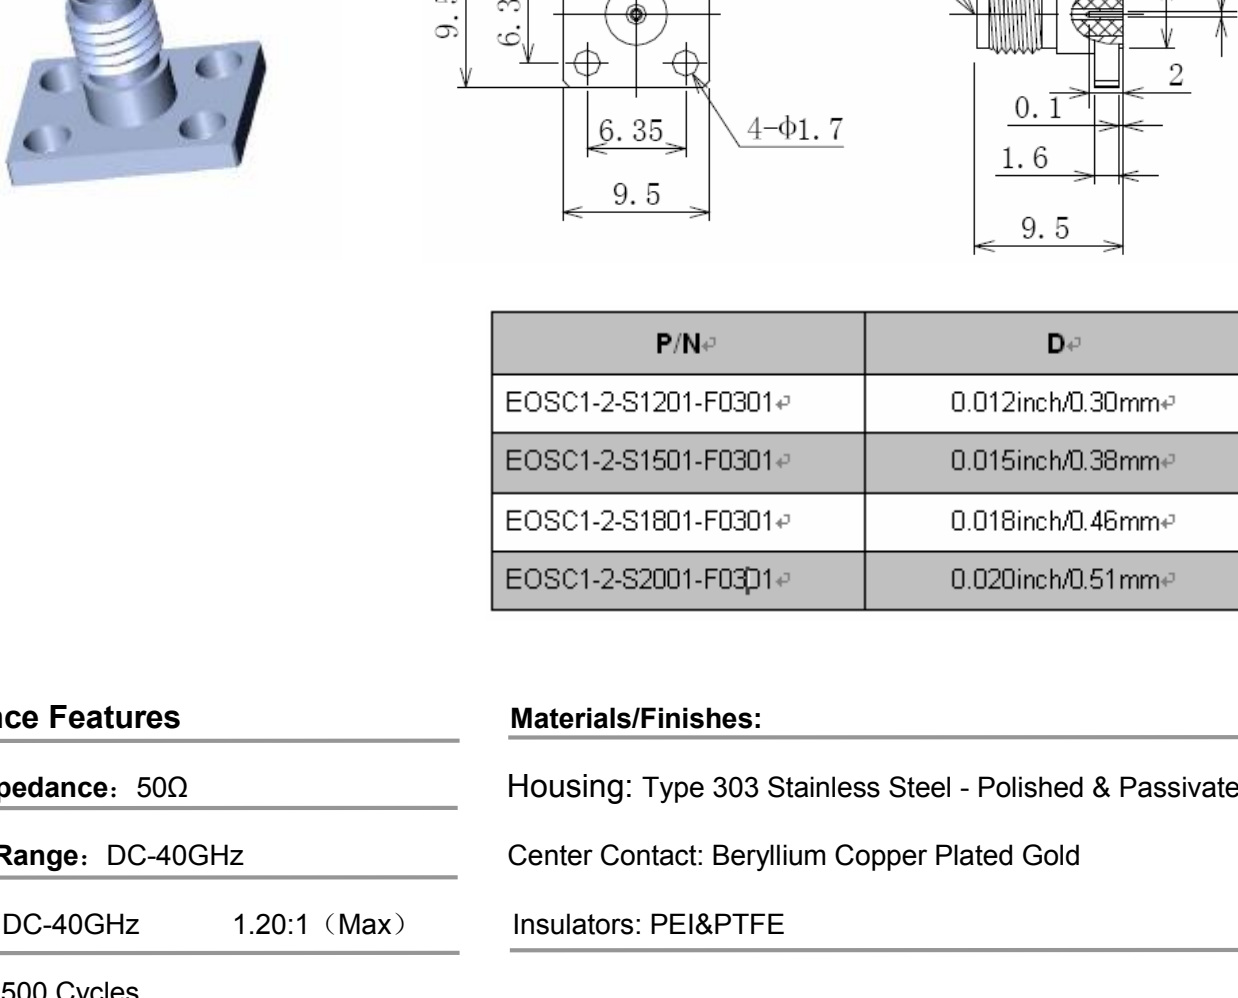


Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.20:1 (Max)	Insulators: PEI&PTFE
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermers
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermers.com E-mail: sales@hermers.com

SSMA Series Field Replaceable Flange Connectors

P/N: EOSC1-2-S1201-F0501

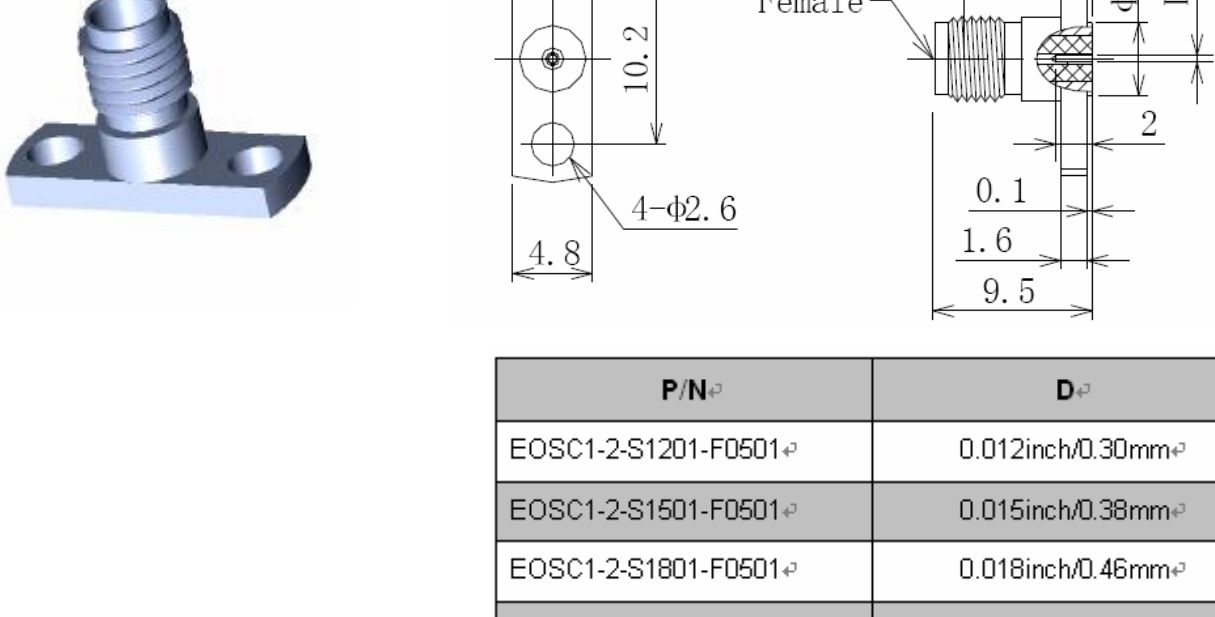


P/N ^①	D ^②
EOSC1-2-S1201-F0501 ^③	0.012inch/0.30mm ^④
EOSC1-2-S1501-F0501 ^③	0.015inch/0.38mm ^④
EOSC1-2-S1801-F0501 ^③	0.018inch/0.46mm ^④
EOSC1-2-S2001-F0501 ^③	0.020inch/0.51mm ^④

Performance Features		
Nominal Impedance: 50Ω		
Frequency Range: DC-40GHz		
VSWR:	DC-40GHz	1.20:1 (Max)
Durability: 500 Cycles		
Operating Temperature: -60℃~+165℃		
Interfaces: PER MIL-STD-348A		

Materials/Finishes:
Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PEI&PTFE

SSMA Series Field Replaceable Flange Connectors

P/N: EOSC1-2-S1201-F0601

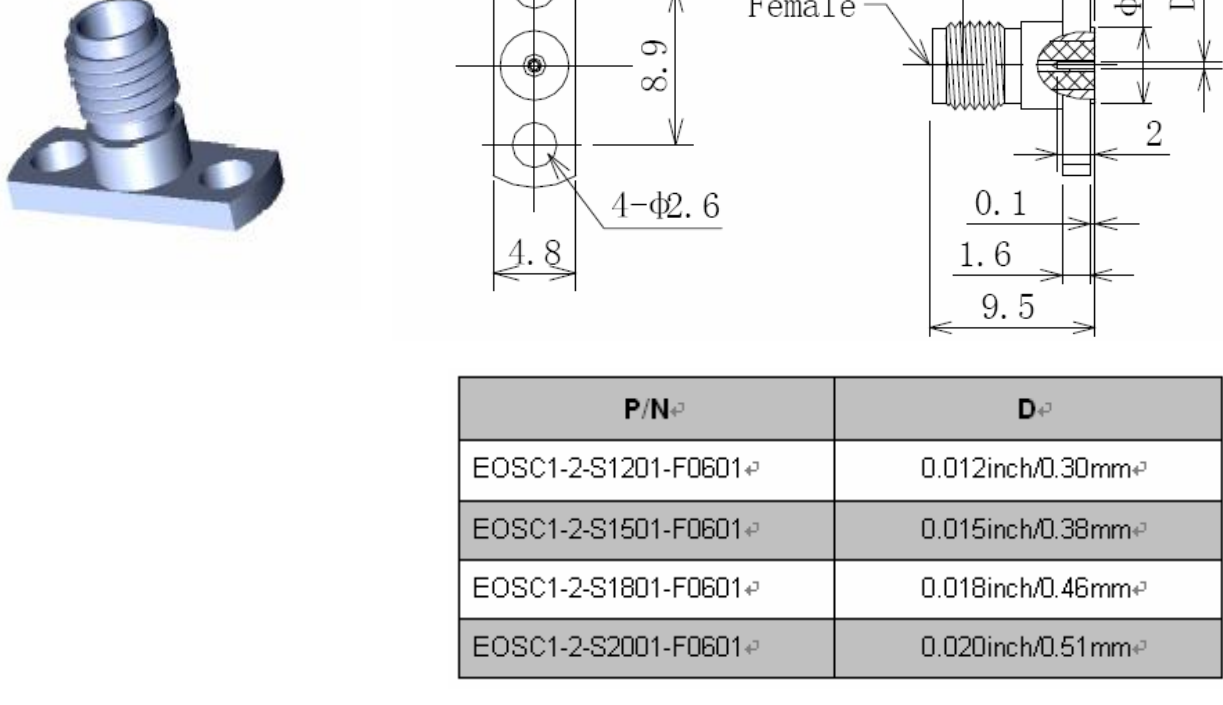


P/N ^①	D ^②
EOSC1-2-S1201-F0601 ^③	0.012inch/0.30mm ^④
EOSC1-2-S1501-F0601 ^③	0.015inch/0.38mm ^④
EOSC1-2-S1801-F0601 ^③	0.018inch/0.46mm ^④
EOSC1-2-S2001-F0601 ^③	0.020inch/0.51mm ^④

Performance Features		
Nominal Impedance: 50Ω		
Frequency Range: DC-40GHz		
VSWR:	DC-40GHz	1.20:1 (Max)
Durability: 500 Cycles		
Operating Temperature: -60℃~+165℃		
Interfaces: PER MIL-STD-348A		

Materials/Finishes:	
Housing: Type 303 Stainless Steel - Polished & Passivated	
Center Contact: Beryllium Copper Plated Gold	
Insulators: PEI&PTFE	

P/N: EOSC1-2-S1201-F0801

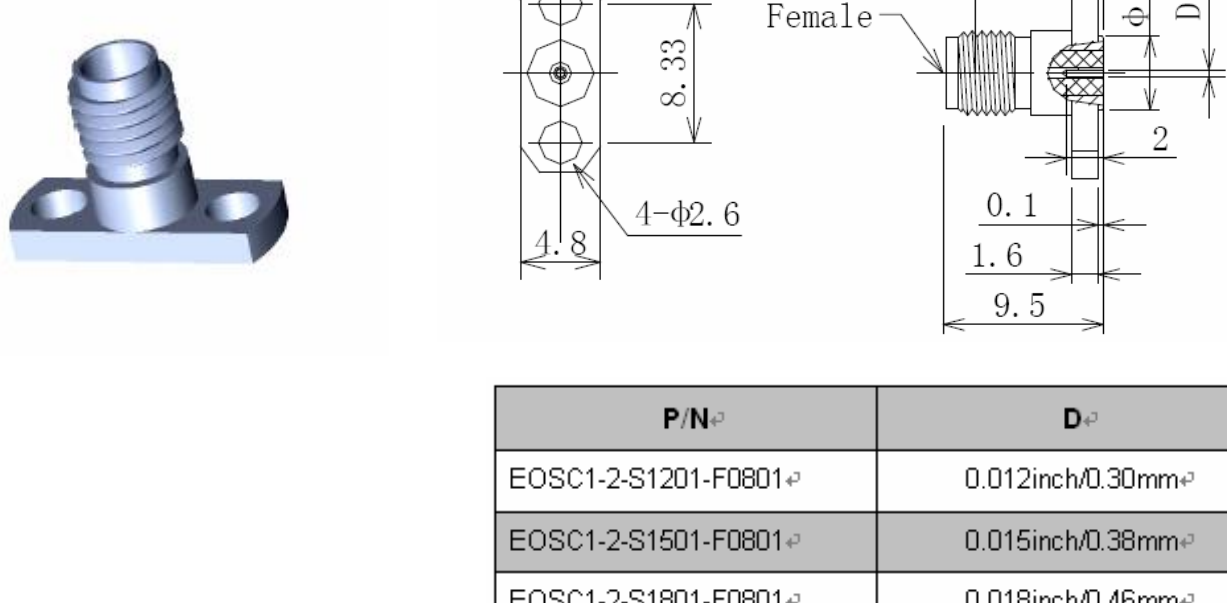

EOSC1-2-S2001-F0801	0.020inch/0.51mm
---------------------	------------------

Materials/Finishes:

Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

Operating Temperature:


Interfaces: PER MIL-STD-3

Add: 2th Floor, Building 8, Jingang Pioneering Ce
Tel: 86-25-85490880 Fax: +86-

Web Site: www.henriettes.com

N Series Field Replaceable Flange Connectors

P/N: EONC1-1-S1801-F0101

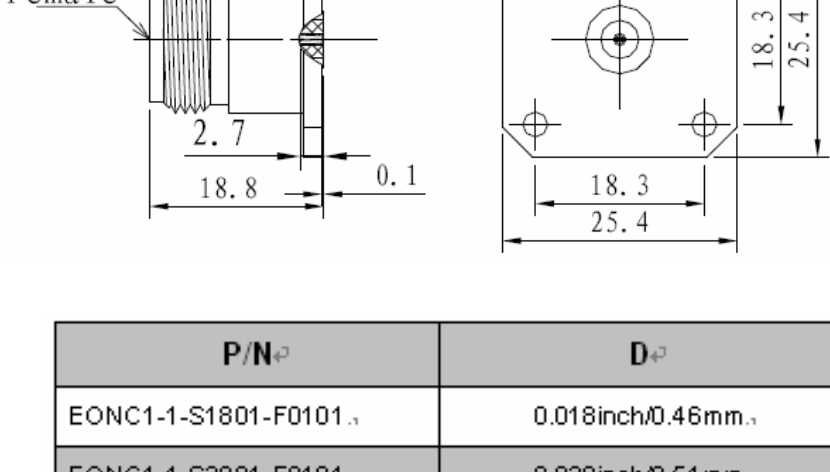

P/N ^①	D ^②
EONC1-1-S1801-F0101 .	0.018inch/0.46mm .
EONC1-1-S2001-F0101 .	0.020inch/0.51mm .
EONC1-1-S3601-F0101 .	0.036inch/0.91mm .

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18GHz

VSWR: DC-18GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:



Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI&PTFE

N Series Field Replaceable Flange Connectors

P/N: EONC1-1-S1801-F0201

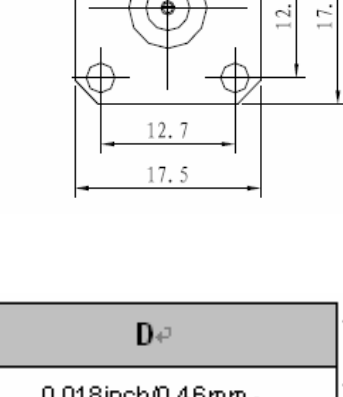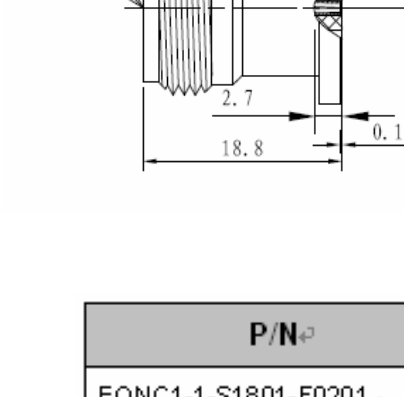

P/N ^①	D ^②
EONC1-1-S1801-F0201 ^③	0.018inch/0.46mm ^④
EONC1-1-S2001-F0201 ^③	0.020inch/0.51mm ^④
EONC1-1-S3601-F0201 ^③	0.036inch/0.91mm ^④


Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-18GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-18GHz 1.15:1(Max)	Insulators: PEI&PTFE
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermercs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880
Web Site: www.hermercs.com

Fax: +86-25-85569295
E-mail: sales@hermercs.com

N Series Field Replaceable Flange Connectors

P/N: EONC1-1-S1801-F0301

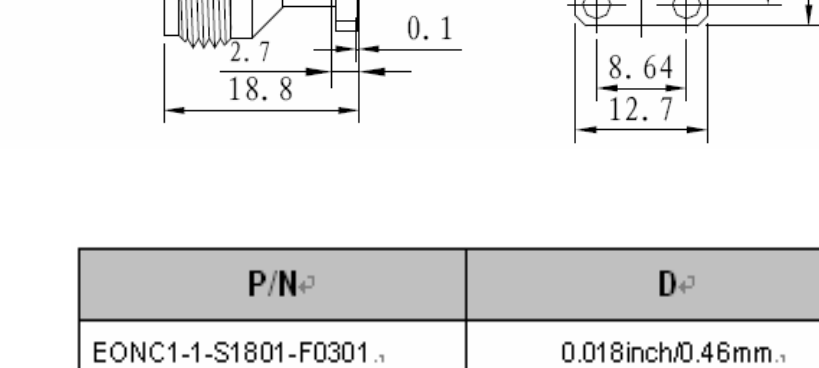


P/N ^①	D ^②
EONC1-1-S1801-F0301 ^③	0.018inch/0.46mm ^④
EONC1-1-S2001-F0301 ^③	0.020inch/0.51mm ^④
EONC1-1-S3601-F0301 ^③	0.036inch/0.91mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-18GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-18GHz 1.15:1(Max)	Insulators: PEI&PTFE
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermerc
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermerc.com E-mail: sales@hermerc.com

N Series Field Replaceable Flange Connectors

P/N: EONC1-1-S1802-F0101

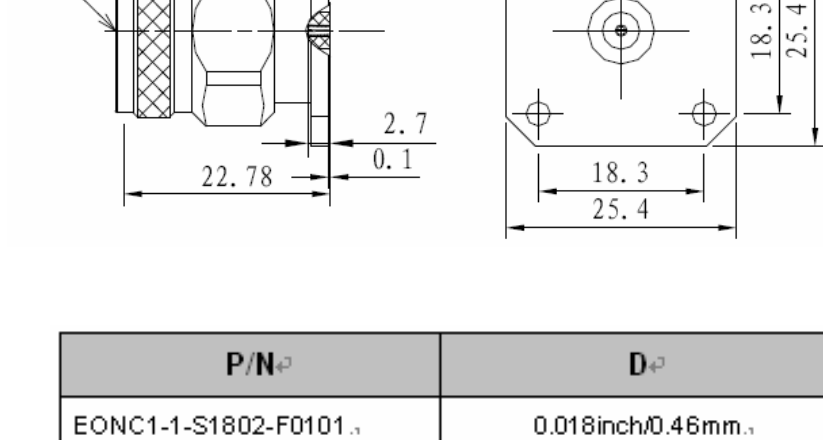

P/N ^①	D ^②
EONC1-1-S1802-F0101 ^③	0.018inch/0.46mm ^④
EONC1-1-S2002-F0101 ^③	0.020inch/0.51mm ^④
EONC1-1-S3602-F0101 ^③	0.036inch/0.91mm ^④



Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-18GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-18GHz 1.15:1(Max)	Insulators: PEI&PTFE
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermercsc
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880
Web Site: www.hermercsc.com

Fax: +86-25-85569295
E-mail: sales@hermercsc.com

N Series Bulkhead Flange Connectors

P/N: EONC1-1-M0101-F0101

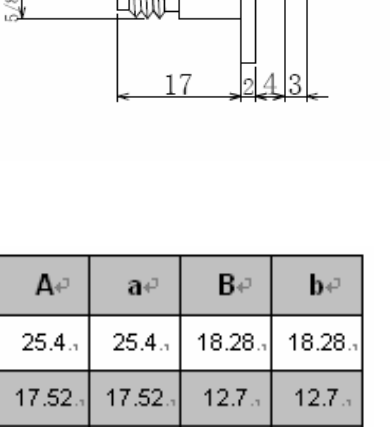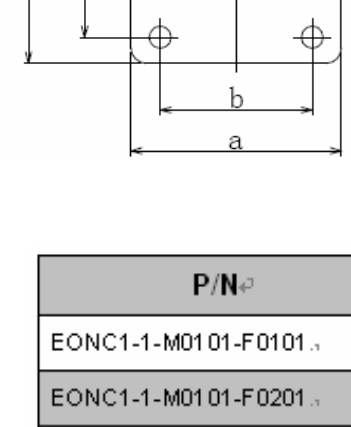

P/N ^①	A ^②	a ^③	B ^④	b ^⑤
EONC1-1-M0101-F0101 ^①	25.4 ^②	25.4 ^③	18.28 ^④	18.28 ^⑤
EONC1-1-M0101-F0201 ^①	17.52 ^②	17.52 ^③	12.7 ^④	12.7 ^⑤
EONC1-1-M0101-F0301 ^①	12.7 ^②	12.7 ^③	8.64 ^④	8.64 ^⑤
EONC1-1-M0101-F0401 ^①	28 ^②	18 ^③	21 ^④	10 ^⑤

Performance Features


Nominal Impedance:	50Ω
Frequency Range:	DC-18GHz
VSWR:	DC-18GHz 1.15:1(Max)
Durability:	500 Cycles
Operating Temperature:	-60℃~+165℃
Interfaces:	PER MIL-STD-348A

Materials/Finishes:

Housing:	Type 303 Stainless Steel - Polished & Passivated
Center Contact:	Beryllium Copper Plated Gold
Insulators:	PEI&PTFE

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0101

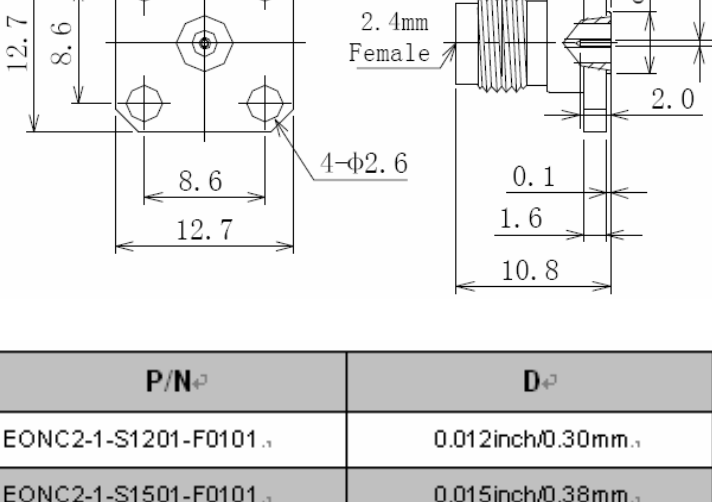


P/N ^①	D ^②
EONC2-1-S1201-F0101 ^③	0.012inch/0.30mm ^④
EONC2-1-S1501-F0101 ^③	0.015inch/0.38mm ^④
EONC2-1-S1801-F0101 ^③	0.018inch/0.46mm ^④
EONC2-1-S2001-F0101 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0201

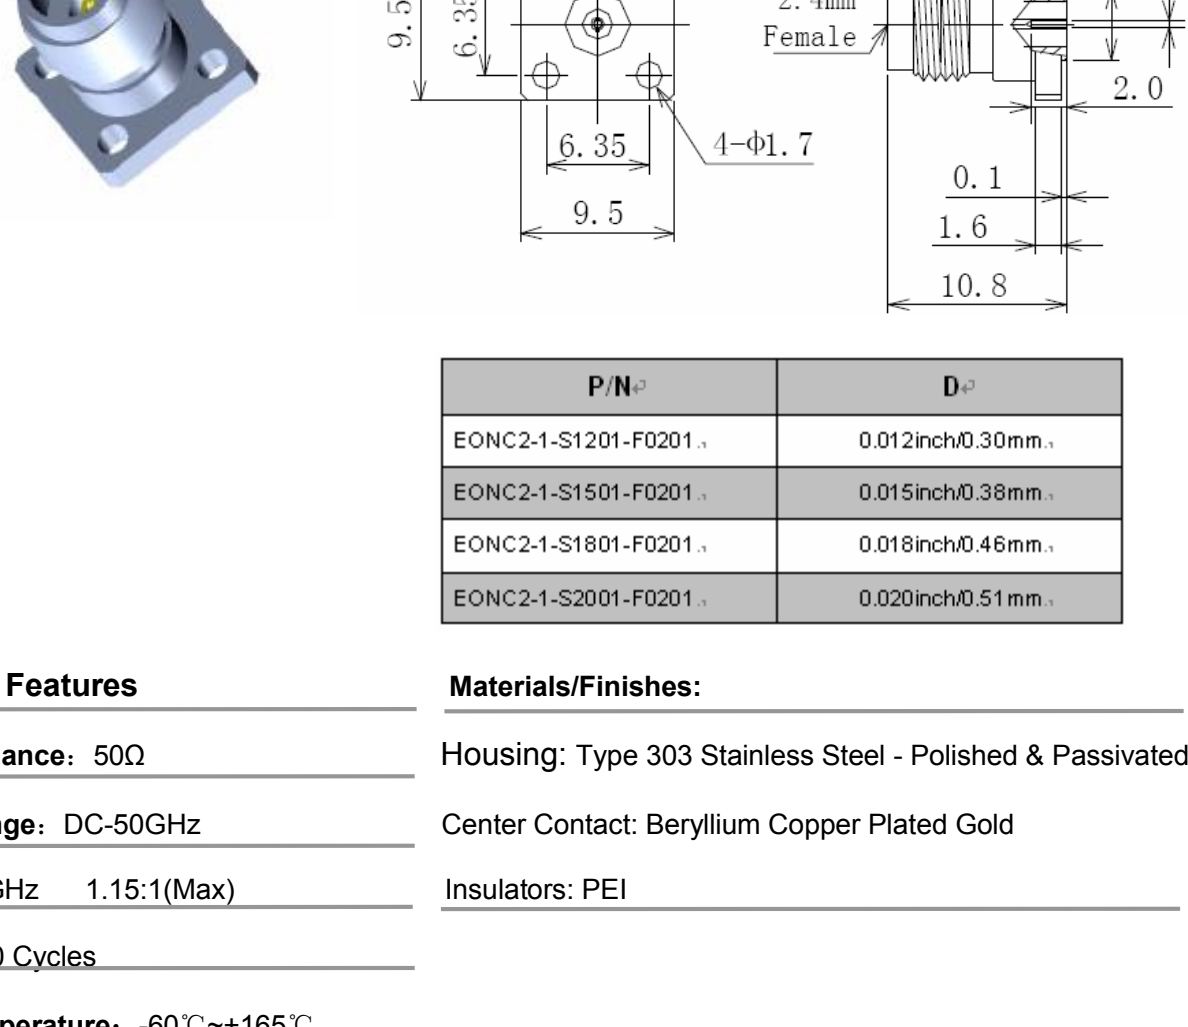


P/N ^①	D ^②
EONC2-1-S1201-F0201 ^③	0.012inch/0.30mm ^④
EONC2-1-S1501-F0201 ^③	0.015inch/0.38mm ^④
EONC2-1-S1801-F0201 ^③	0.018inch/0.46mm ^④
EONC2-1-S2001-F0201 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0301

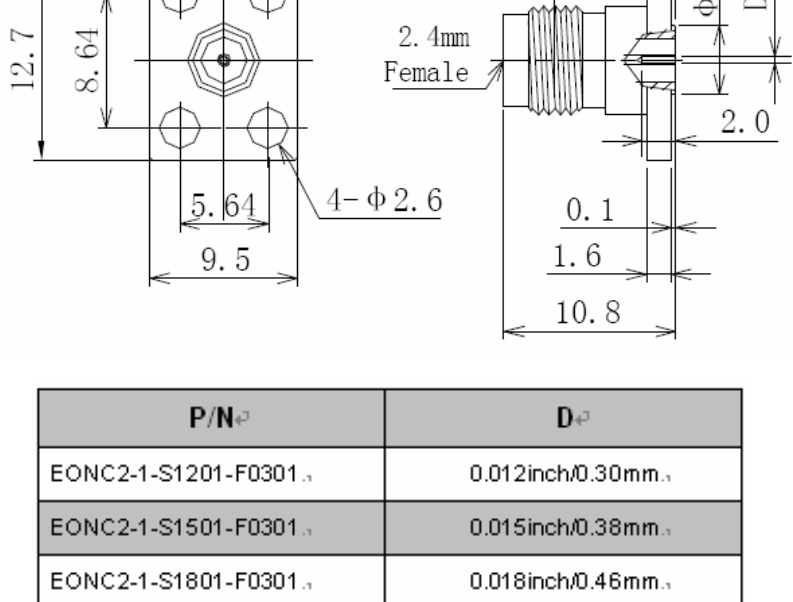

P/N ^①	D ^②
EONC2-1-S1201-F0301 ^③	0.012inch0.30mm ^④
EONC2-1-S1501-F0301 ^③	0.015inch0.38mm ^④
EONC2-1-S1801-F0301 ^③	0.018inch0.46mm ^④
EONC2-1-S2001-F0301 ^③	0.020inch0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-50GHz

VSWR: DC-50GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0401

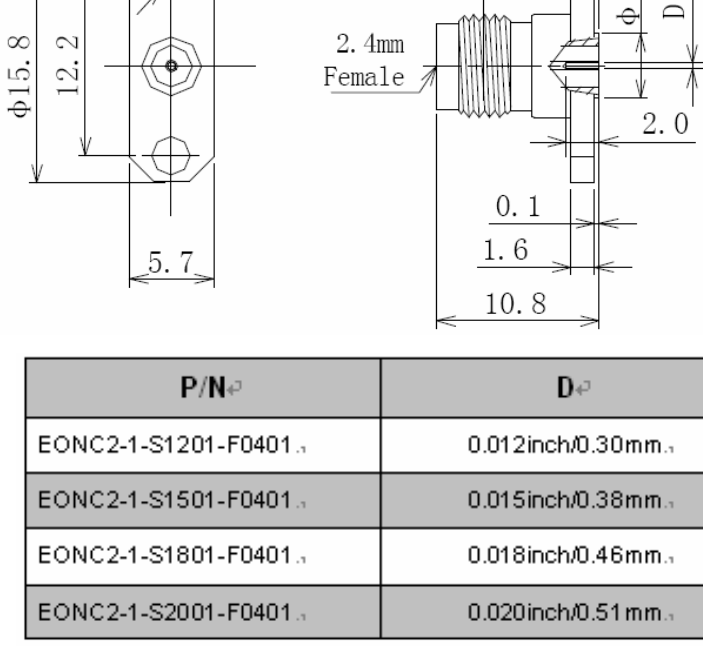


P/N ^①	D ^②
EONC2-1-S1201-F0401 ^③	0.012inch/0.30mm ^④
EONC2-1-S1501-F0401 ^③	0.015inch/0.38mm ^④
EONC2-1-S1801-F0401 ^③	0.018inch/0.46mm ^④
EONC2-1-S2001-F0401 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0501

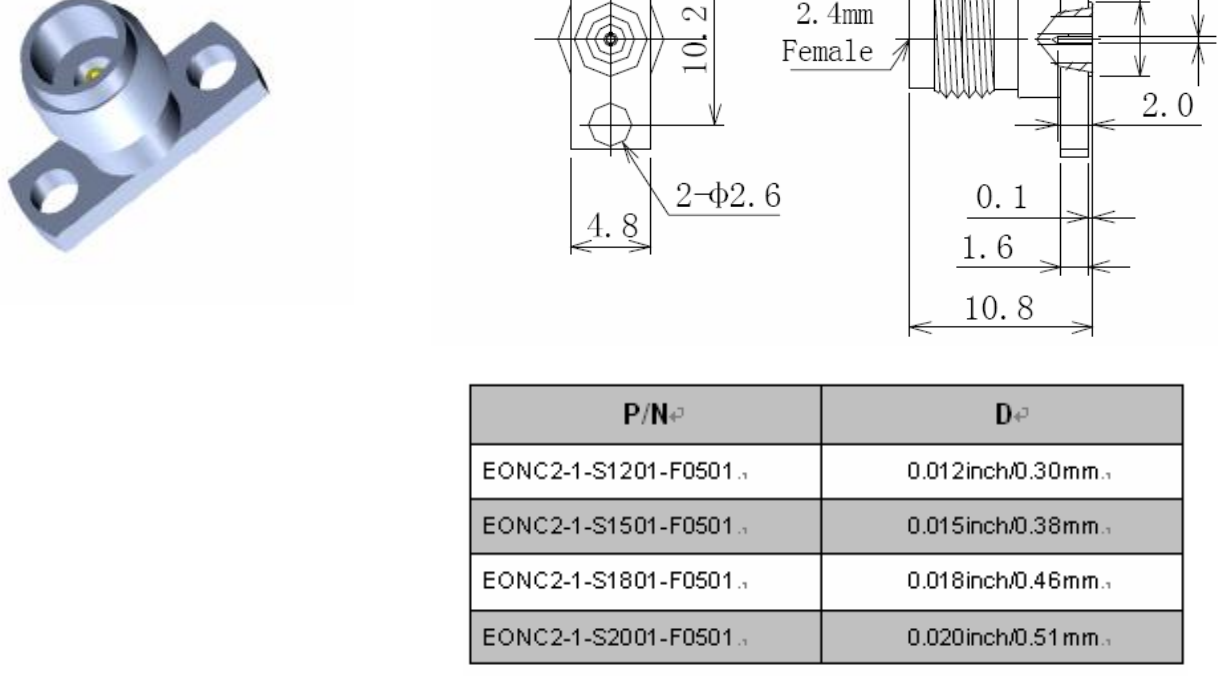

P/N ^①	D ^②
EONC2-1-S1201-F0501 ^③	0.012inch/0.30mm ^④
EONC2-1-S1501-F0501 ^③	0.015inch/0.38mm ^④
EONC2-1-S1801-F0501 ^③	0.018inch/0.46mm ^④
EONC2-1-S2001-F0501 ^③	0.020inch/0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-50GHz

VSWR: DC-50GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:



Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0601

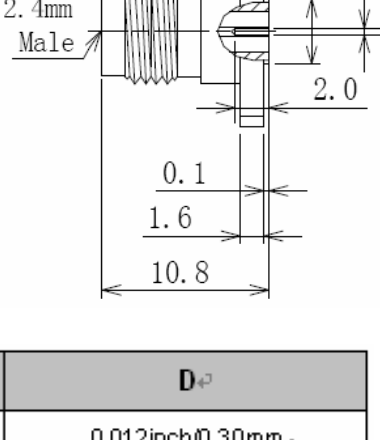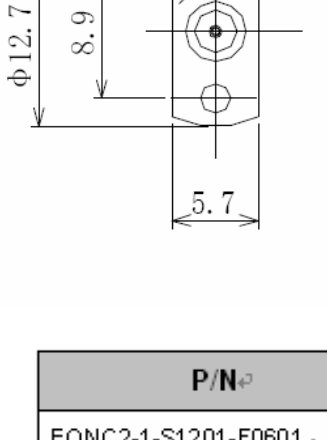


P/N ^①	D ^②
EONC2-1-S1201-F0601 ^③	0.012inch/0.30mm ^④
EONC2-1-S1501-F0601 ^③	0.015inch/0.38mm ^④
EONC2-1-S1801-F0601 ^③	0.018inch/0.46mm ^④
EONC2-1-S2001-F0601 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1201-F0701

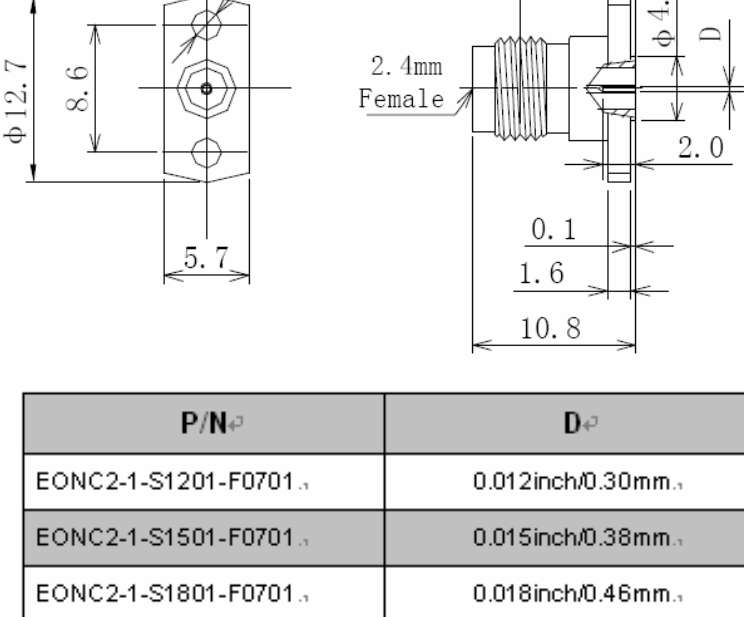

P/N ^①	D ^②
EONC2-1-S1201-F0701 ₁	0.012inch/0.30mm ₁
EONC2-1-S1501-F0701 ₁	0.015inch/0.38mm ₁
EONC2-1-S1801-F0701 ₁	0.018inch/0.46mm ₁
EONC2-1-S2001-F0701 ₁	0.020inch/0.51mm ₁


Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermerc
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880
Web Site: www.hermerc.com

Fax: +86-25-85569295
E-mail: sales@hermerc.com

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1202-F0101

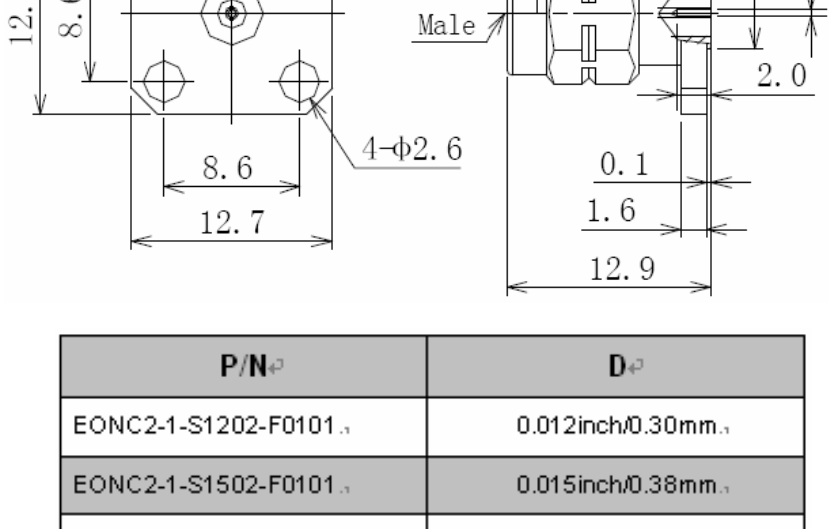


P/N ^①	D ^②
EONC2-1-S1202-F0101 ①	0.012inch0.30mm ②
EONC2-1-S1502-F0101 ①	0.015inch0.38mm ②
EONC2-1-S1802-F0101 ①	0.018inch0.46mm ②
EONC2-1-S2002-F0101 ①	0.020inch0.51mm ②

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1202-F0201

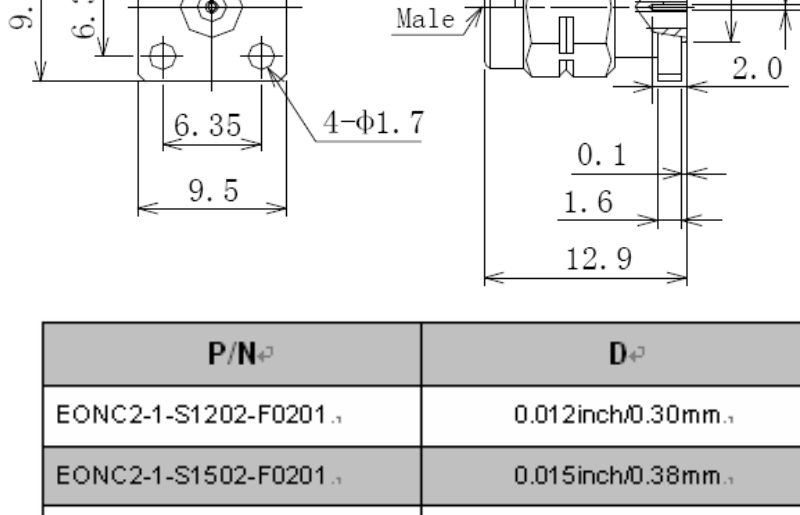


P/N ^①	D ^②
EONC2-1-S1202-F0201 ^③	0.012inch/0.30mm ^④
EONC2-1-S1502-F0201 ^③	0.015inch/0.38mm ^④
EONC2-1-S1802-F0201 ^③	0.018inch/0.46mm ^④
EONC2-1-S2002-F0201 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1202-F0301

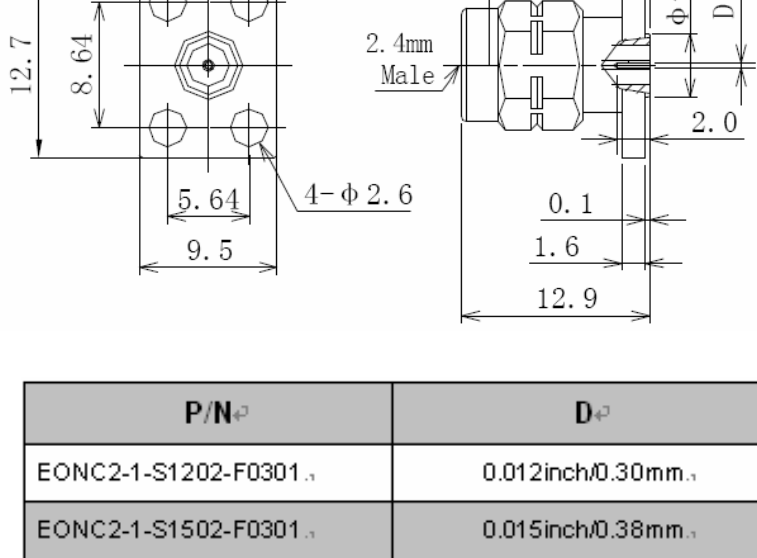


P/N ^①	D ^②
EONC2-1-S1202-F0301 ^③	0.012inch/0.30mm ^④
EONC2-1-S1502-F0301 ^③	0.015inch/0.38mm ^④
EONC2-1-S1802-F0301 ^③	0.018inch/0.46mm ^④
EONC2-1-S2002-F0301 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermerscs
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880 Fax: +86-25-85569295
Web Site: www.hermerscs.com E-mail: sales@hermerscs.com

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1202-F0401

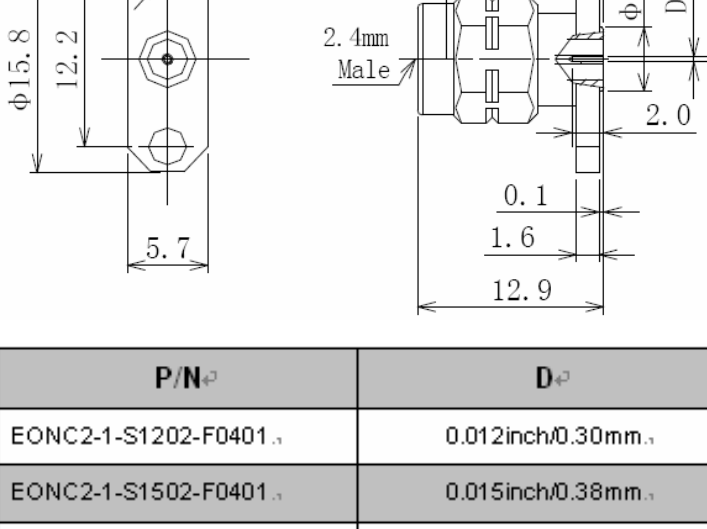


P/N	D
EONC2-1-S1202-F0401	0.012inch/0.30mm
EONC2-1-S1502-F0401	0.015inch/0.38mm
EONC2-1-S1802-F0401	0.018inch/0.46mm
EONC2-1-S2002-F0401	0.020inch/0.51mm

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1202-F0501

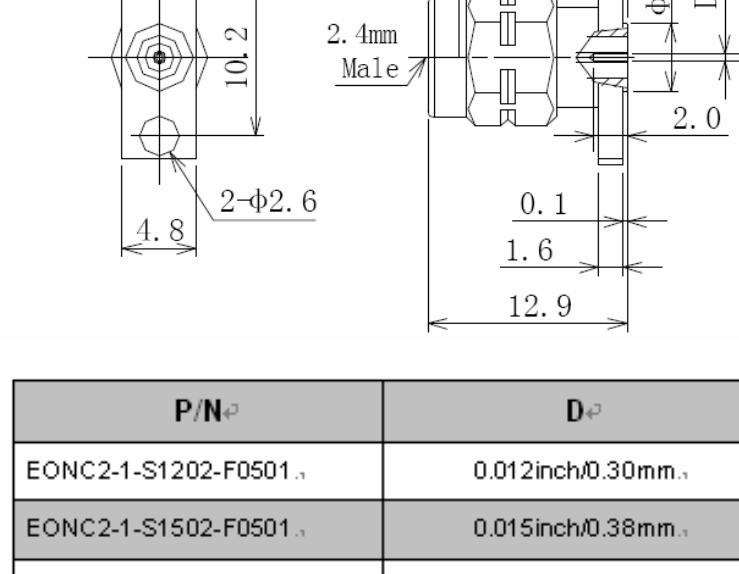


P/N ^①	D ^②
EONC2-1-S1202-F0501 ①	0.012inch/0.30mm ②
EONC2-1-S1502-F0501 ①	0.015inch/0.38mm ②
EONC2-1-S1802-F0501 ①	0.018inch/0.46mm ②
EONC2-1-S2002-F0501 ①	0.020inch/0.51mm ②

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Flange Connectors

P/N: EONC2-1-S1202-F0601

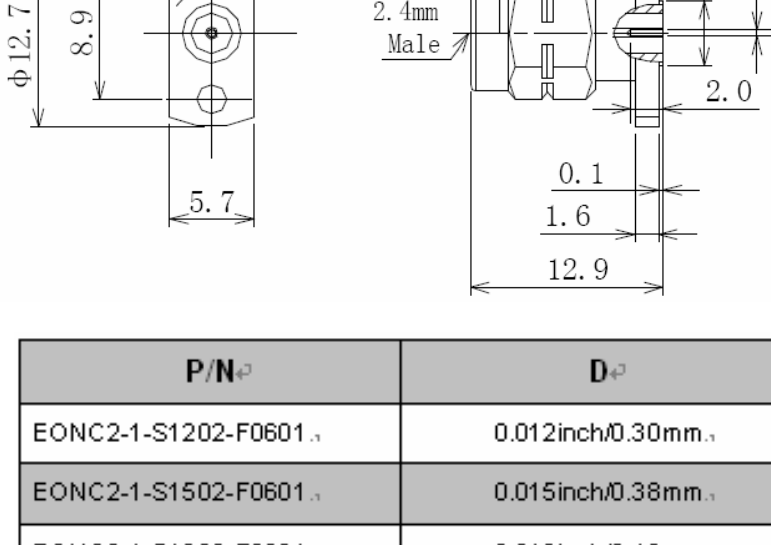


P/N ^a	D ^{a1}
EONC2-1-S1202-F0601 ^a	0.012inch/0.30mm ^a
EONC2-1-S1502-F0601 ^a	0.015inch/0.38mm ^a
EONC2-1-S1802-F0601 ^a	0.018inch/0.46mm ^a
EONC2-1-S2002-F0601 ^a	0.020inch/0.51mm ^a

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Field Replaceable Thread-in Connectors

P/N: EONC2-1-S1201-T0101

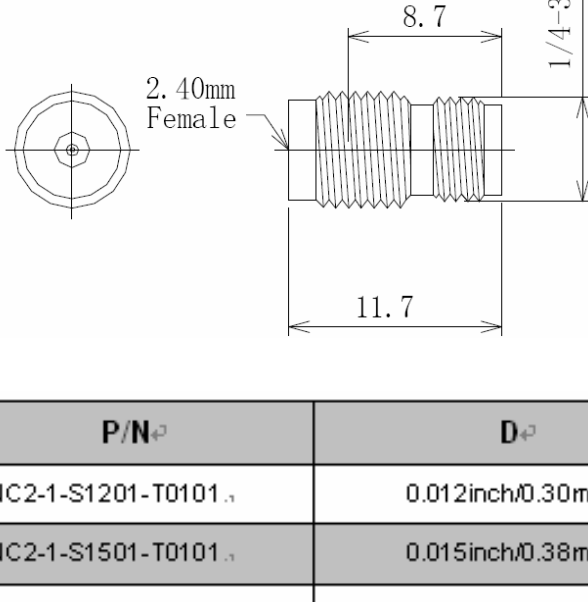


P/N ^①	D ^②
EONC2-1-S1201-T0101 ^③	0.012inch/0.30mm ^④
EONC2-1-S1501-T0101 ^③	0.015inch/0.38mm ^④
EONC2-1-S1801-T0101 ^③	0.018inch/0.46mm ^④
EONC2-1-S2001-T0101 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Bulkhead Flange Connectors

P/N: EONC2-1-TLX02-F0101

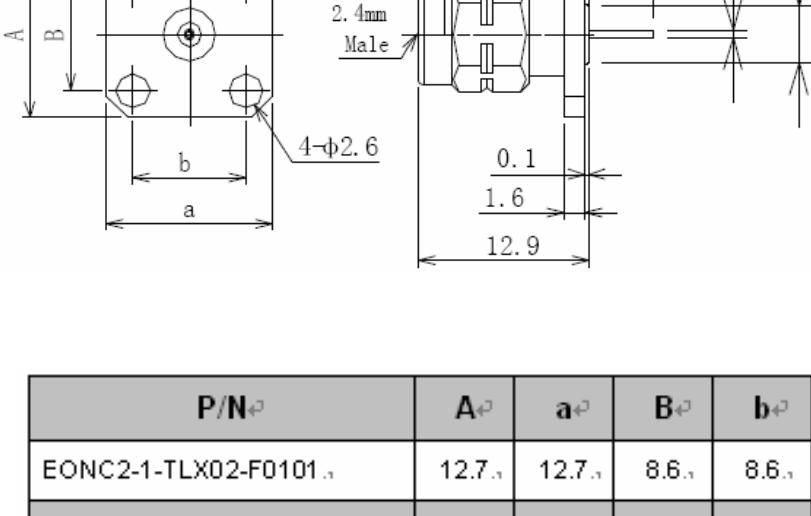

P/N ^①	A ^②	a ^②	B ^③	b ^③
EONC2-1-TLX02-F0101 ^④	12.7 ^⑤	12.7 ^⑤	8.6 ^⑥	8.6 ^⑥
EONC2-1-TLX02-F0201 ^④	9.5 ^⑤	9.5 ^⑤	6.35 ^⑥	6.35 ^⑥
EONC2-1-TLX02-F0301 ^④	12.7 ^⑤	9.5 ^⑤	8.64 ^⑥	5.64 ^⑥


Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermerc
Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046
Tel: 86-25-85490880
Web Site: www.hermerc.com

Fax: +86-25-85569295
E-mail: sales@hermerc.com

2.4mm Series Bulkhead Flange Connectors

P/N: EONC2-1-TLX02-F0401

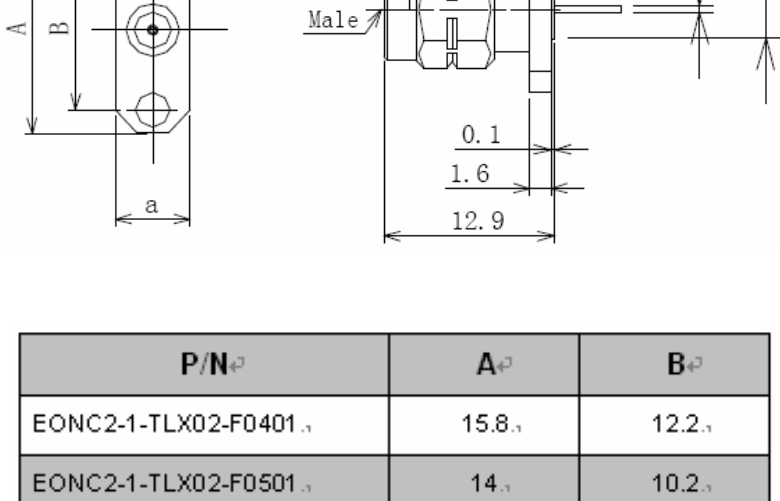


P/N ^①	A ^②	B ^③
EONC2-1-TLX02-F0401 ^④	15.8 ^⑤	12.2 ^⑥
EONC2-1-TLX02-F0501 ^④	14 ^⑤	10.2 ^⑥
EONC2-1-TLX02-F0601 ^④	12.7 ^⑤	8.9 ^⑥

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.4mm Series Bulkhead Flange Connectors

P/N: EONC2-1-TLX01-F0101

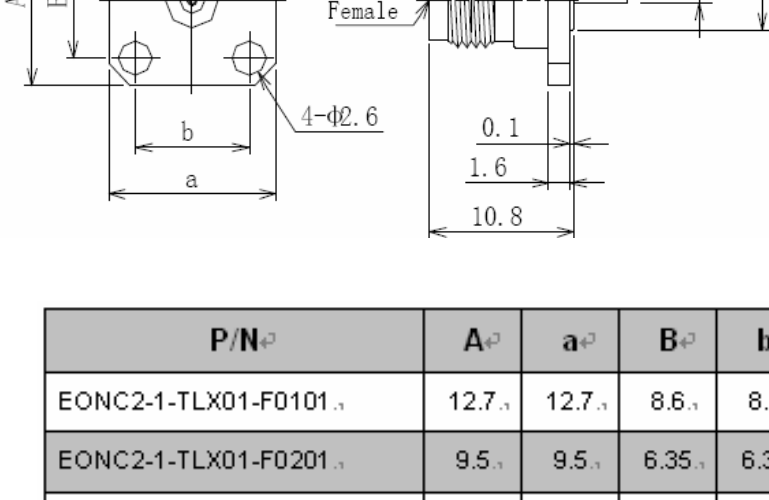

P/N ^①	A ^②	a ^②	B ^②	b ^②
EONC2-1-TLX01-F0101 ^③	12.7 ^④	12.7 ^④	8.6 ^④	8.6 ^④
EONC2-1-TLX01-F0201 ^③	9.5 ^④	9.5 ^④	6.35 ^④	6.35 ^④
EONC2-1-TLX01-F0301 ^③	12.7 ^④	9.5 ^④	8.64 ^④	5.64 ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

Hermercsc

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880


Web Site: www.hermercsc.com

Fax: +86-25-85569295

E-mail: sales@hermercsc.com

2.4mm Series Bulkhead Flange Connectors

P/N: EONC2-1-TLX01-F0401

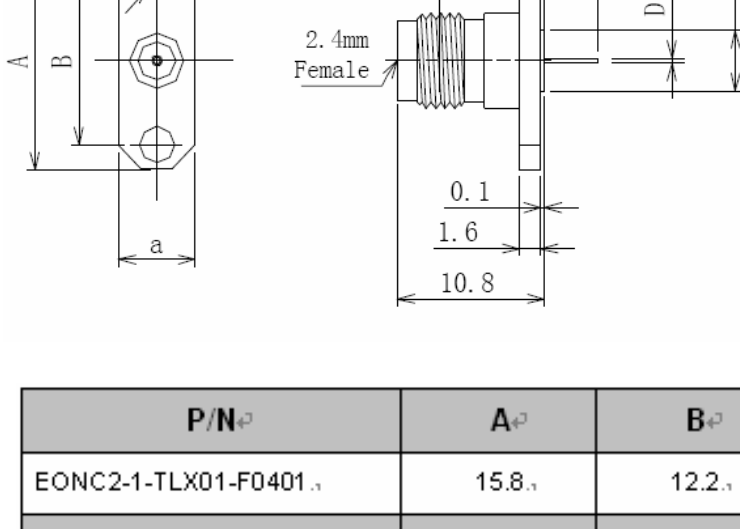


P/N ^①	A ^②	B ^③
EONC2-1-TLX01-F0401 ④	15.8 ⑤	12.2 ⑥
EONC2-1-TLX01-F0501 ④	14 ⑤	10.2 ⑥
EONC2-1-TLX01-F0601 ④	12.7 ⑤	8.9 ⑥

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-50GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-50GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0101

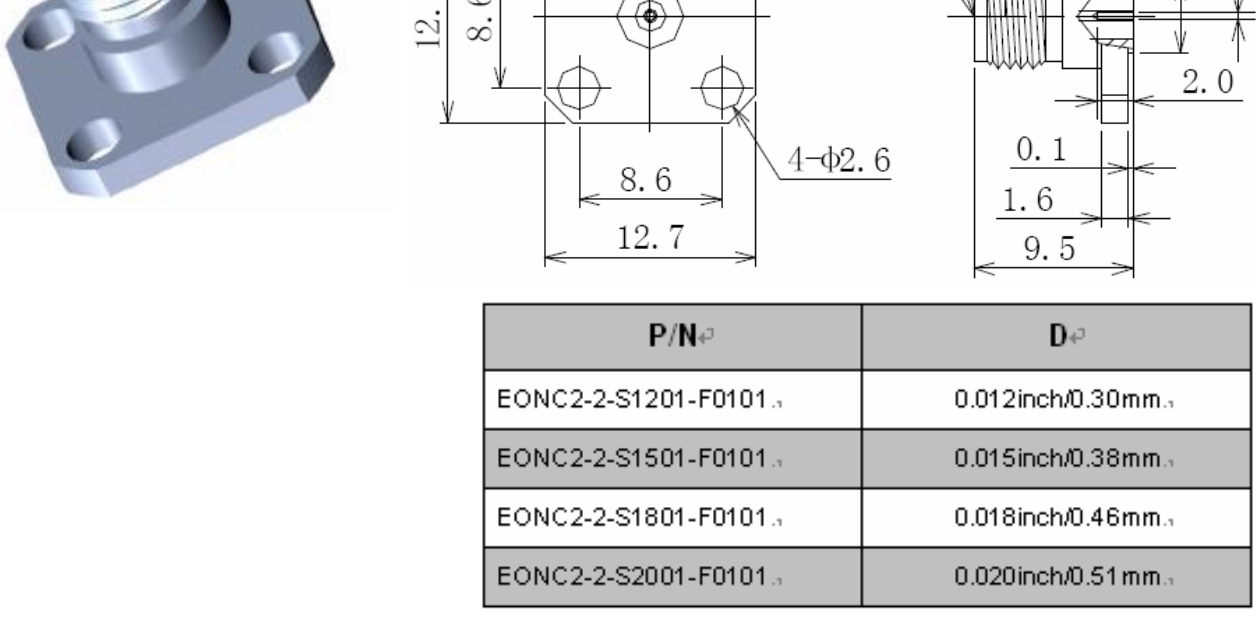


P/N ^①	D ^②
EONC2-2-S1201-F0101 ^③	0.012inch/0.30mm ^④
EONC2-2-S1501-F0101 ^③	0.015inch/0.38mm ^④
EONC2-2-S1801-F0101 ^③	0.018inch/0.46mm ^④
EONC2-2-S2001-F0101 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0201

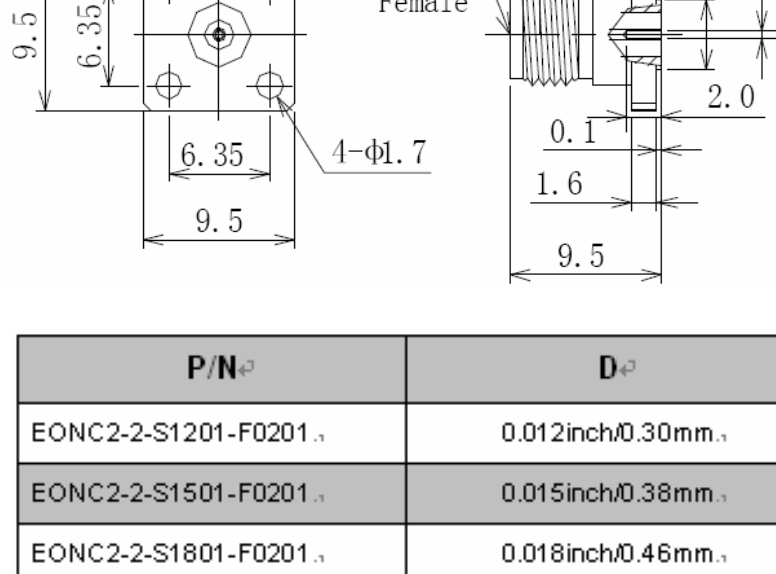

P/N ^①	D ^②
EONC2-2-S1201-F0201 ^③	0.012inch/0.30mm ^④
EONC2-2-S1501-F0201 ^③	0.015inch/0.38mm ^④
EONC2-2-S1801-F0201 ^③	0.018inch/0.46mm ^④
EONC2-2-S2001-F0201 ^③	0.020inch/0.51mm ^④

Performance Features


Nominal Impedance:	50Ω
Frequency Range:	DC-40GHz
VSWR:	DC-40GHz 1.15:1(Max)
Durability:	500 Cycles
Operating Temperature:	-60℃~+165℃
Interfaces:	PER MIL-STD-348A

Materials/Finishes:

Housing:	Type 303 Stainless Steel - Polished & Passivated
Center Contact:	Beryllium Copper Plated Gold
Insulators:	PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0301

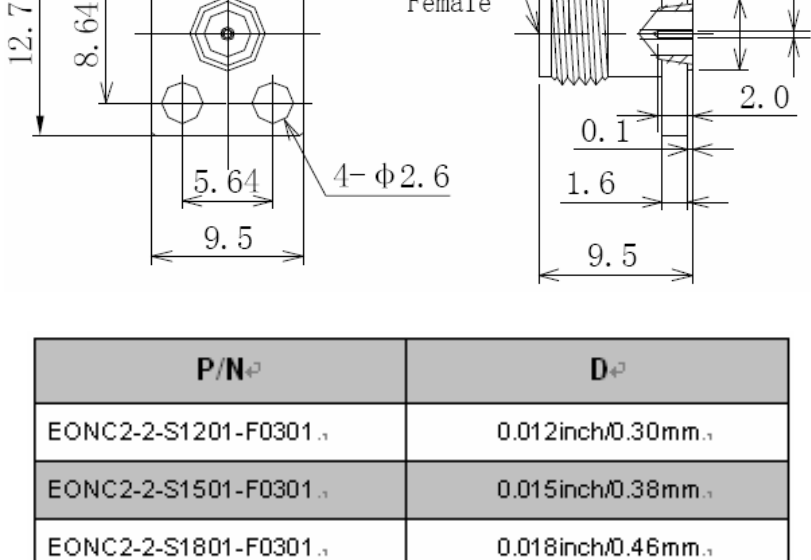

P/N ^①	D ^②
EONC2-2-S1201-F0301 ^③	0.012inch/0.30mm ^④
EONC2-2-S1501-F0301 ^③	0.015inch/0.38mm ^④
EONC2-2-S1801-F0301 ^③	0.018inch/0.46mm ^④
EONC2-2-S2001-F0301 ^③	0.020inch/0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0401

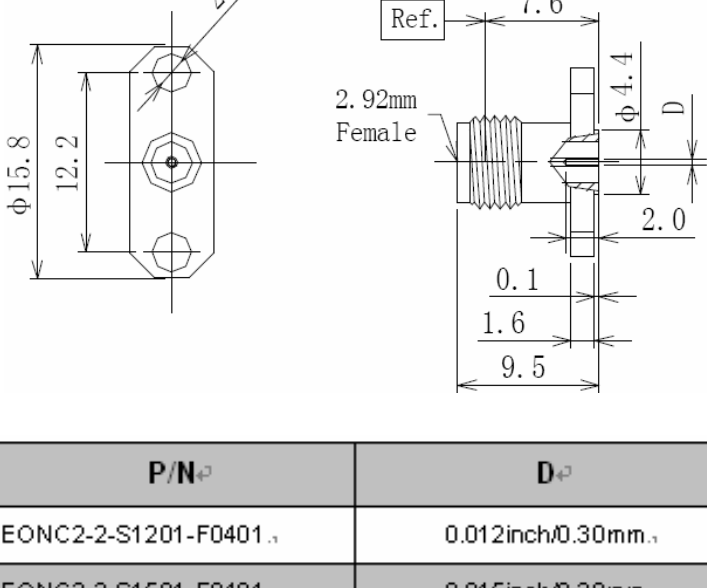


P/N	D
EONC2-2-S1201-F0401	0.012inch0.30mm
EONC2-2-S1501-F0401	0.015inch0.38mm
EONC2-2-S1801-F0401	0.018inch0.46mm
EONC2-2-S2001-F0401	0.020inch0.51mm

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0501

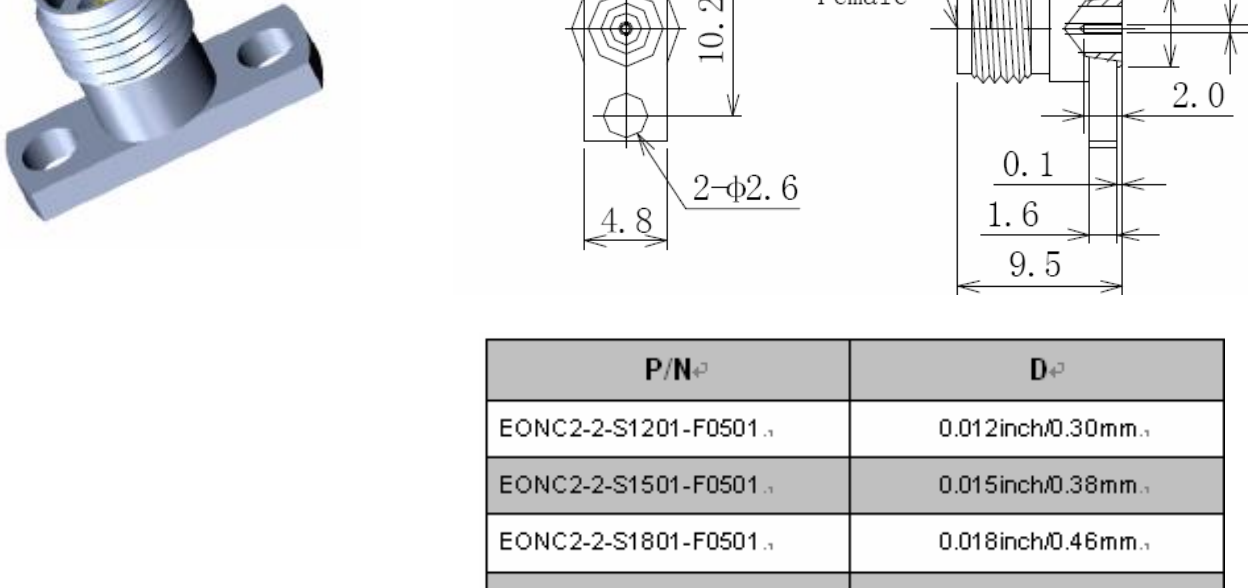

P/N	D
EONC2-2-S1201-F0501	0.012inch0.30mm
EONC2-2-S1501-F0501	0.015inch0.38mm
EONC2-2-S1801-F0501	0.018inch0.46mm
EONC2-2-S2001-F0501	0.020inch0.51mm

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0601

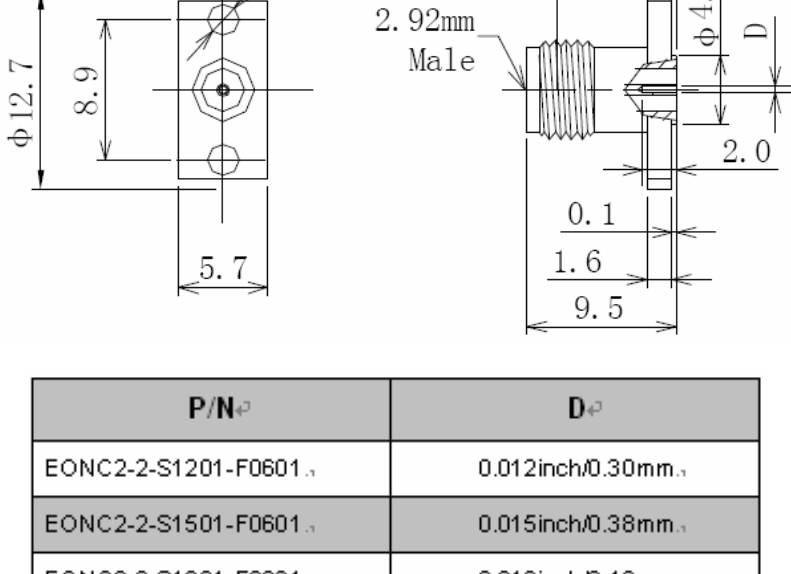


P/N ^①	D ^②
EONC2-2-S1201-F0601 ^③	0.012inch/0.30mm ^④
EONC2-2-S1501-F0601 ^③	0.015inch/0.38mm ^④
EONC2-2-S1801-F0601 ^③	0.018inch/0.46mm ^④
EONC2-2-S2001-F0601 ^③	0.020inch/0.51mm ^④

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1201-F0701

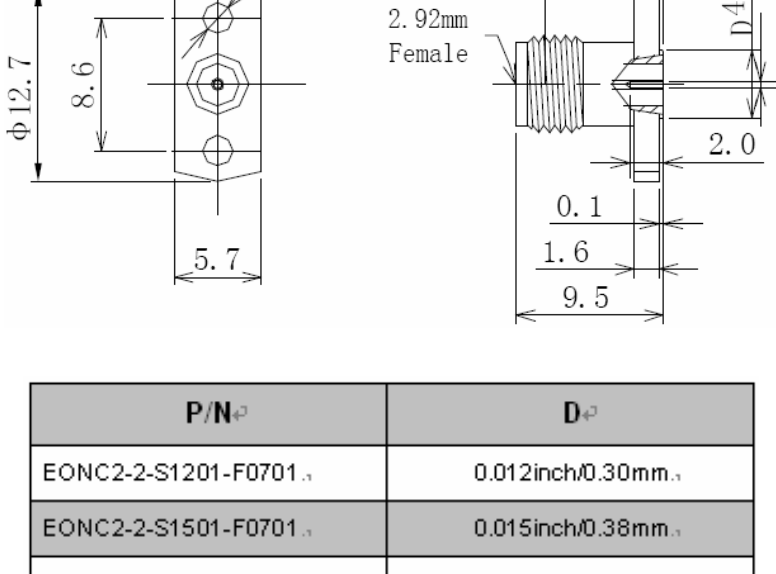

P/N ^①	D ^②
EONC2-2-S1201-F0701 ^③	0.012inch/0.30mm ^④
EONC2-2-S1501-F0701 ^③	0.015inch/0.38mm ^④
EONC2-2-S1801-F0701 ^③	0.018inch/0.46mm ^④
EONC2-2-S2001-F0701 ^③	0.020inch/0.51mm ^④

Performance Features


Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz 1.15:1(Max)
Durability: 500 Cycles
Operating Temperature: -60℃~+165℃
Interfaces: PER MIL-STD-348A

Materials/Finishes:

Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1202-F0101

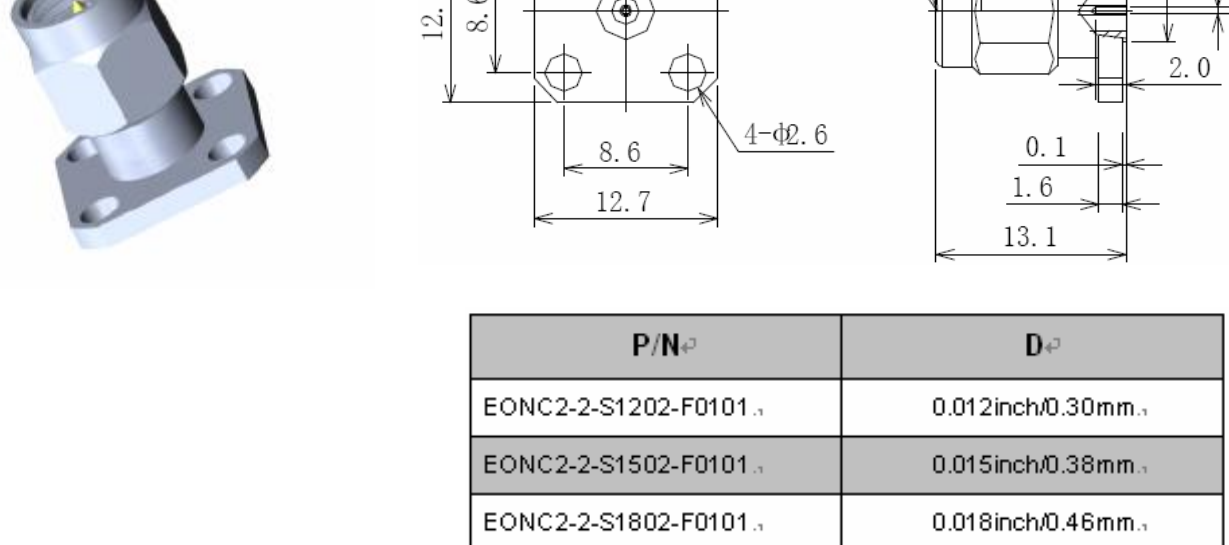

P/N ^①	D ^②
EONC2-2-S1202-F0101 ^③	0.012inch/0.30mm ^④
EONC2-2-S1502-F0101 ^③	0.015inch/0.38mm ^④
EONC2-2-S1802-F0101 ^③	0.018inch/0.46mm ^④
EONC2-2-S2002-F0101 ^③	0.020inch/0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1202-F0201

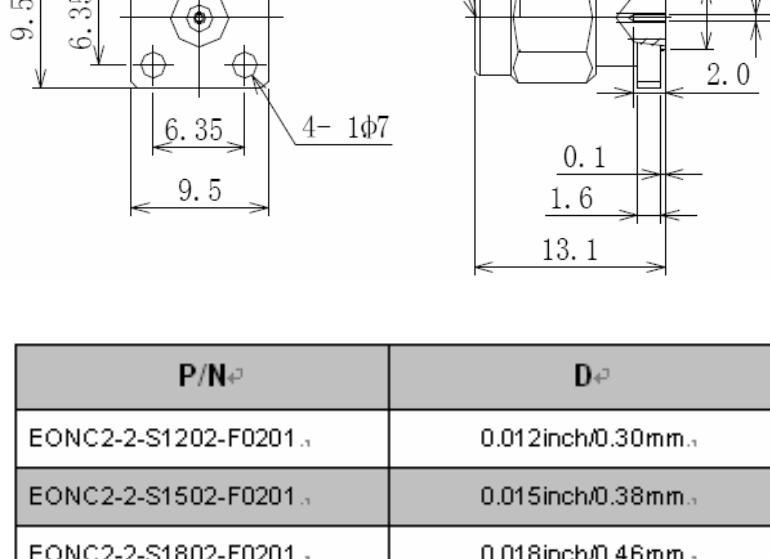

P/N ^①	D ^②
EONC2-2-S1202-F0201 ^③	0.012inch/0.30mm ^④
EONC2-2-S1502-F0201 ^③	0.015inch/0.38mm ^④
EONC2-2-S1802-F0201 ^③	0.018inch/0.46mm ^④
EONC2-2-S2002-F0201 ^③	0.020inch/0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1202-F0301

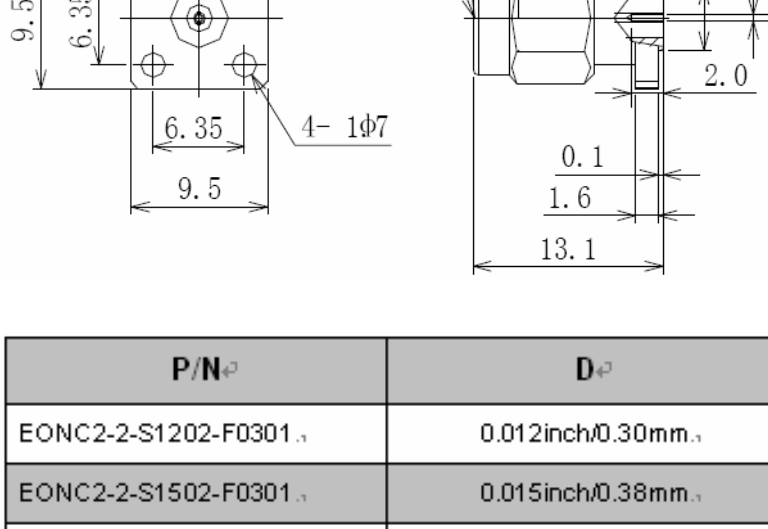

P/N ^①	D ^②
EONC2-2-S1202-F0301 ^③	0.012inch/0.30mm ^④
EONC2-2-S1502-F0301 ^③	0.015inch/0.38mm ^④
EONC2-2-S1802-F0301 ^③	0.018inch/0.46mm ^④
EONC2-2-S2002-F0301 ^③	0.020inch/0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:



Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1202-F0401

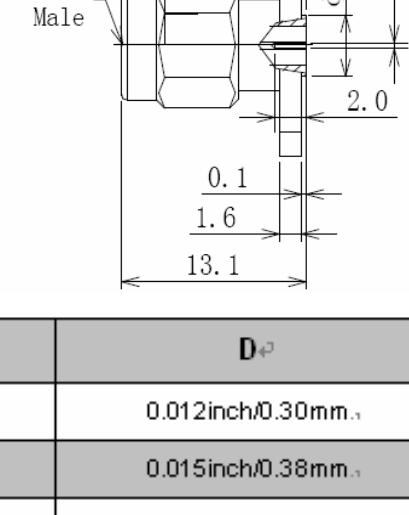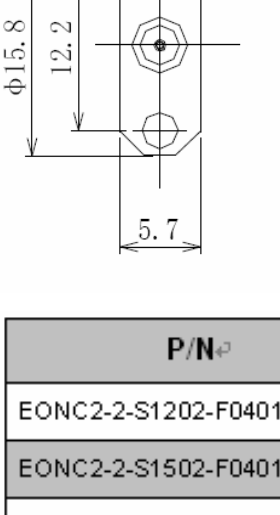

P/N ^①	D ^②
EONC2-2-S1202-F0401 ^③	0.012inch/0.30mm ^④
EONC2-2-S1502-F0401 ^③	0.015inch/0.38mm ^④
EONC2-2-S1802-F0401 ^③	0.018inch/0.46mm ^④
EONC2-2-S2002-F0401 ^③	0.020inch/0.51mm ^④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1202-F0501

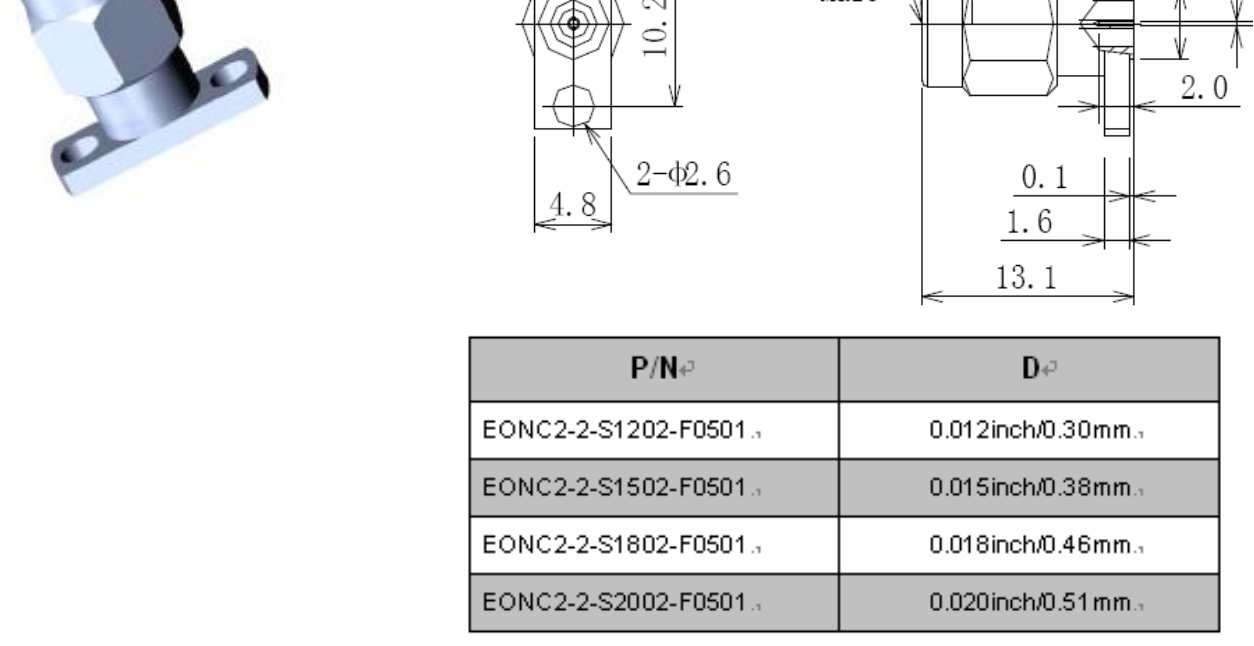

P/N ^①	D ^②
EONC2-2-S1202-F0501 .	0.012inch/0.30mm .
EONC2-2-S1502-F0501 .	0.015inch/0.38mm .
EONC2-2-S1802-F0501 .	0.018inch/0.46mm .
EONC2-2-S2002-F0501 .	0.020inch/0.51mm .

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Flange Connectors

P/N: EONC2-2-S1202-F0601

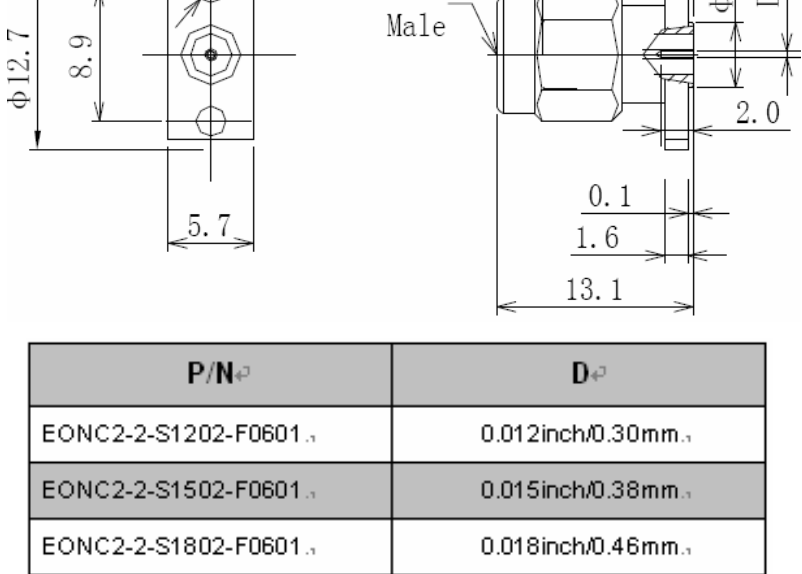

P/N ^①	D ^②
EONC2-2-S1202-F0601 .	0.012inch/0.30mm .
EONC2-2-S1502-F0601 .	0.015inch/0.38mm .
EONC2-2-S1802-F0601 .	0.018inch/0.46mm .
EONC2-2-S2002-F0601 .	0.020inch/0.51mm .

Performance Features


Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz 1.15:1(Max)
Durability: 500 Cycles
Operating Temperature: -60℃~+165℃
Interfaces: PER MIL-STD-348A

Materials/Finishes:

Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PEI

2.92mm Series Field Replaceable Thread-in Connectors

P/N: EONC2-2-S1201-T0101

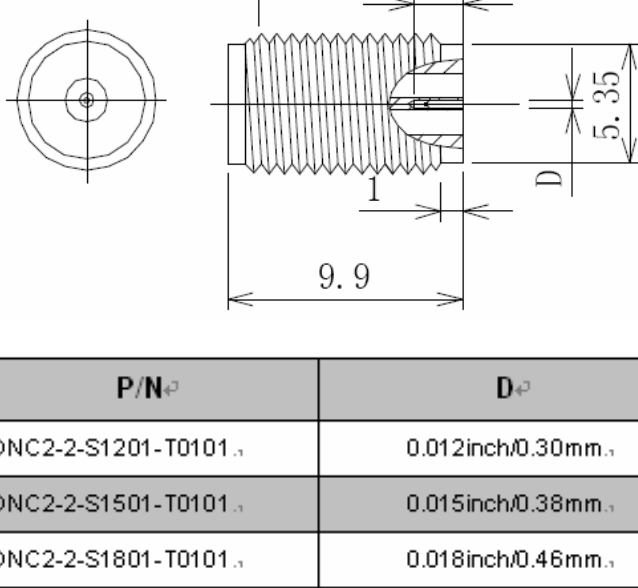

P/N ^①	D ^②
EONC2-2-S1201-T0101 ③	0.012inch/0.30mm ④
EONC2-2-S1501-T0101 ③	0.015inch/0.38mm ④
EONC2-2-S1801-T0101 ③	0.018inch/0.46mm ④
EONC2-2-S2001-T0101 ③	0.020inch/0.51mm ④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Field Replaceable Thread-in Connectors

P/N: EONC2-2-S1201-T0201

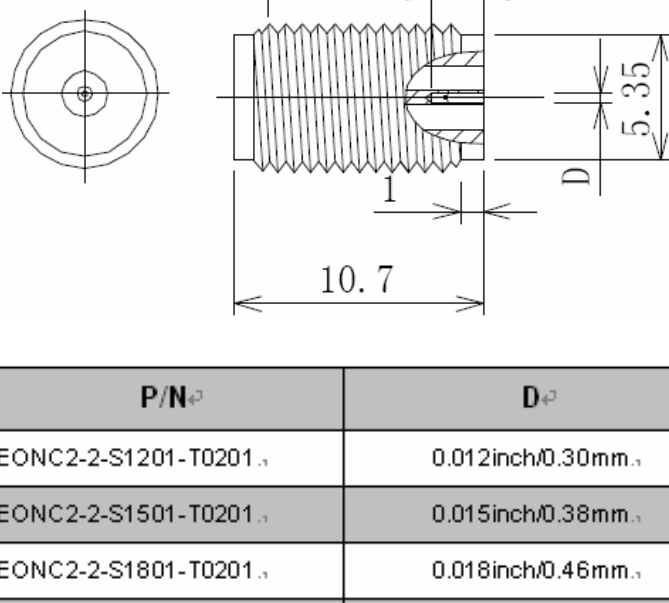

P/N ^①	D ^②
EONC2-2-S1201-T0201 ③	0.012inch/0.30mm ④
EONC2-2-S1501-T0201 ③	0.015inch/0.38mm ④
EONC2-2-S1801-T0201 ③	0.018inch/0.46mm ④
EONC2-2-S2001-T0201 ③	0.020inch/0.51mm ④

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Bulkhead Flange Connectors

P/N: EONC2-2-TLX02-F0101

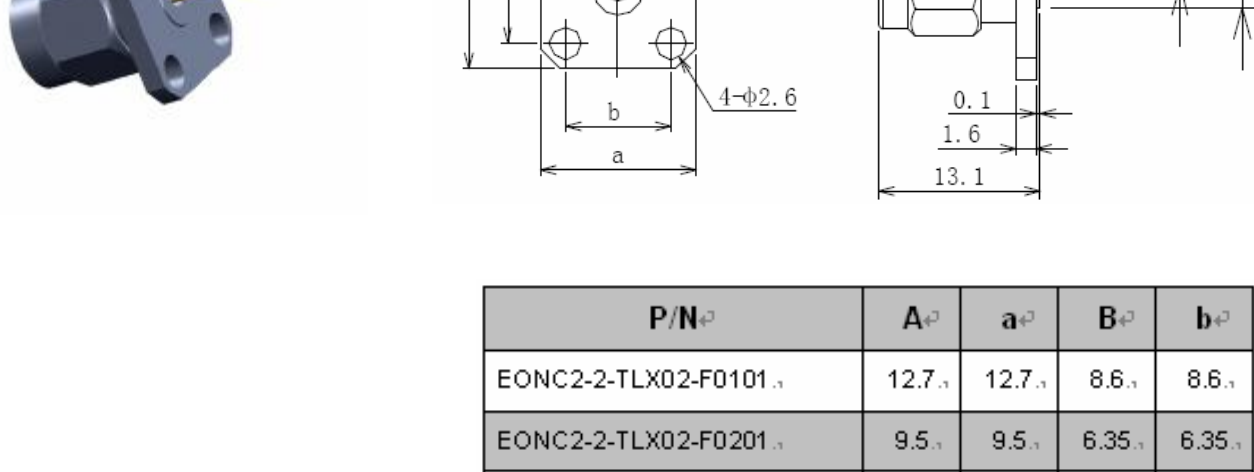


P/N ^①	A ^②	a ^②	B ^③	b ^③
EONC2-2-TLX02-F0101 ^①	12.7 ^②	12.7 ^②	8.6 ^③	8.6 ^③
EONC2-2-TLX02-F0201 ^①	9.5 ^②	9.5 ^②	6.35 ^③	6.35 ^③
EONC2-2-TLX02-F0301 ^①	12.7 ^②	9.5 ^②	8.64 ^③	5.64 ^③

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.92mm Series Bulkhead Flange Connectors

P/N: EONC2-2-TLX02-F0401

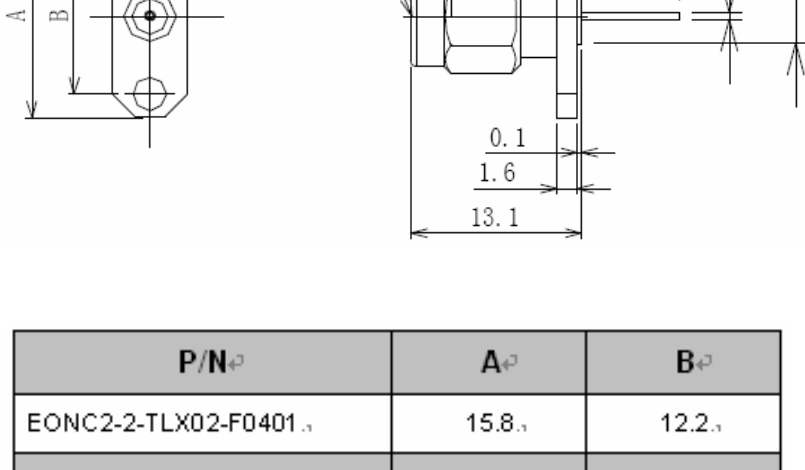

P/N ^①	A ^②	B ^③
EONC2-2-TLX02-F0401 ^①	15.8 ^①	12.2 ^①
EOSEC1-1-M0101-F0501 ^①	14 ^①	10.2 ^①
EOSEC1-1-M0101-F0601 ^①	12.7 ^①	8.9 ^①

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

VSWR: DC-40GHz 1.15:1(Max)

Durability: 500 Cycles

Operating Temperature: -60℃~+165℃

Interfaces: PER MIL-STD-348A

Materials/Finishes:


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

2.92mm Series Bulkhead Flange Connectors

P/N: EONC2-2-TLX01-F0101


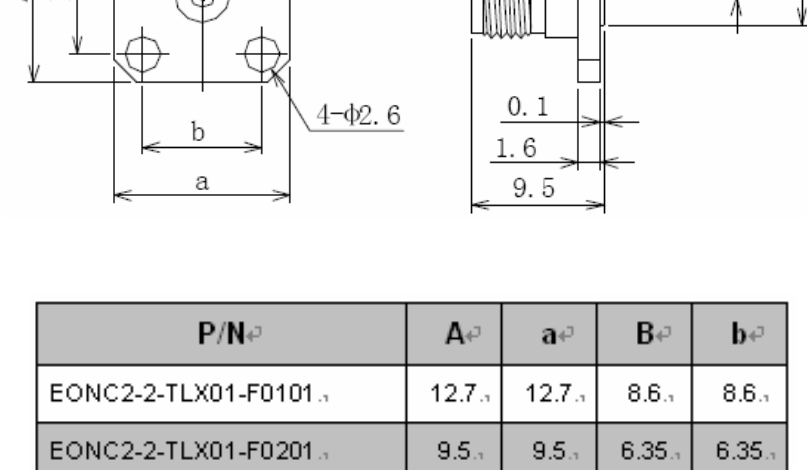


P/N ^①	A ^②	a ^③	B ^④	b ^⑤
EONC2-2-TLX01-F0101 ^①	12.7 ^②	12.7 ^③	8.6 ^④	8.6 ^⑤
EONC2-2-TLX01-F0201 ^①	9.5 ^②	9.5 ^③	6.35 ^④	6.35 ^⑤
EONC2-2-TLX01-F0301 ^①	12.7 ^②	9.5 ^③	8.64 ^④	5.64 ^⑤

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	

2.92mm Series Bulkhead Flange Connectors

P/N: EONC2-2-TLX01-F0401

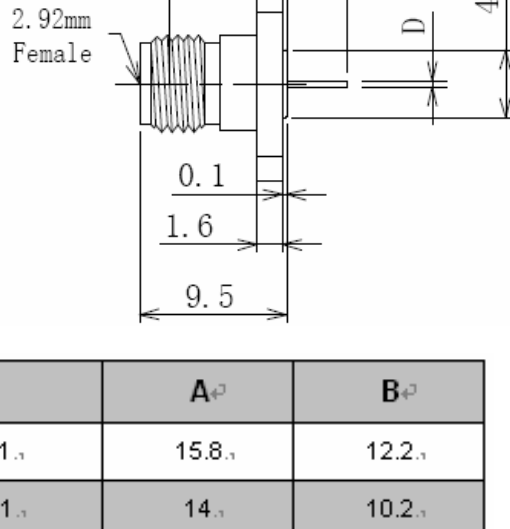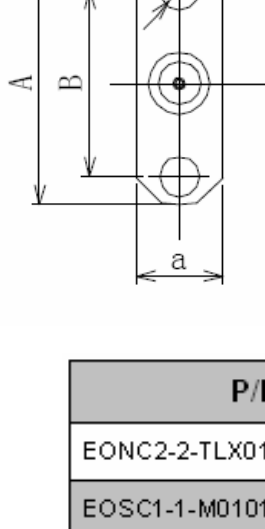

P/N ^①	A ^②	B ^③
EONC2-2-TLX01-F0401 ^④	15.8 ^⑤	12.2 ^⑥
EOSC1-1-M0101-F0501 ^④	14 ^⑤	10.2 ^⑥
EOSC1-1-M0101-F0601 ^④	12.7 ^⑤	8.9 ^⑥

Performance Features	Materials/Finishes:
Nominal Impedance: 50Ω	Housing: Type 303 Stainless Steel - Polished & Passivated
Frequency Range: DC-40GHz	Center Contact: Beryllium Copper Plated Gold
VSWR: DC-40GHz 1.15:1(Max)	Insulators: PEI
Durability: 500 Cycles	
Operating Temperature: -60℃~+165℃	
Interfaces: PER MIL-STD-348A	



We highlight values as:

Customer Focused Value Delivered
Growth Synergic Innovation Driven

www.hermercs.com
sales@hermercs.com