


Typical Model No.	HDC3500-6500C01CW/CCW
Connector Type	SMA
Frequency Range	3.5GHz~6.5GHz
Band Width	300MHz
Insertion Loss	0.6 dB.Max
Isolation	50 dB.Min
VSWR	1.20Max
Average Power	20 Watt
Operating Temp.	- 40 °C to 75 °C

Physical Dimensions

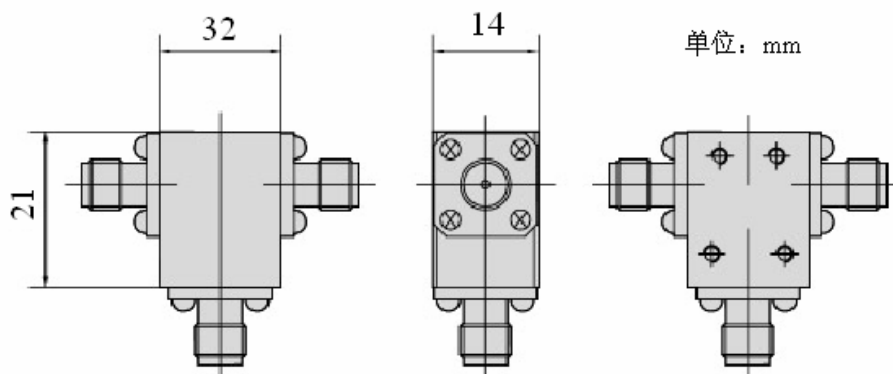

- Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hemrercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hemrercs.com

Fax: +86-25-85569295

E-mail: sales@hemrercs.com

Coaxial Circulators



Model No.	Connector Type	Frequency Range GHz	Band	Insertion	Isolation	VSWR	Operating Temp. ℃	Average Power W	Size
			Width	Loss					L*W*H
			MHz	dB.Max	dB.Min	Max			mm
HSC3500-6500C01CW/CCW	SMA	3.5-6.5	300	0.3	23	1.20	-40~75	20	16*21*14
			600	0.4	20	1.20			
HDC3500-6500C01CW/CCW	SMA	3.5-6.5	300	0.6	50	1.20	-40~75	20	32*21*14
HSC3500-6500C02CW/CCW	SMA/N	3.5-6.5	300	0.3	23	1.20	-40~75	20	20*24*18
			600	0.4	20	1.20			

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hemrercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hemrercs.com

Fax: +86-25-85569295

E-mail: sales@hemrercs.com