


Typical Model No.	HSC3100-3500S01CW/CCW
Connector Type	TAB
Frequency Range	3.1GHz~3.5GHz
Band Width	FULL
Insertion Loss	0.4 dB.Max
Isolation	18 dB.Min
VSWR	1.30Max
Average Power	20 Watt
Operating Temp.	− 30 °C to 70 °C

Physical Dimensions

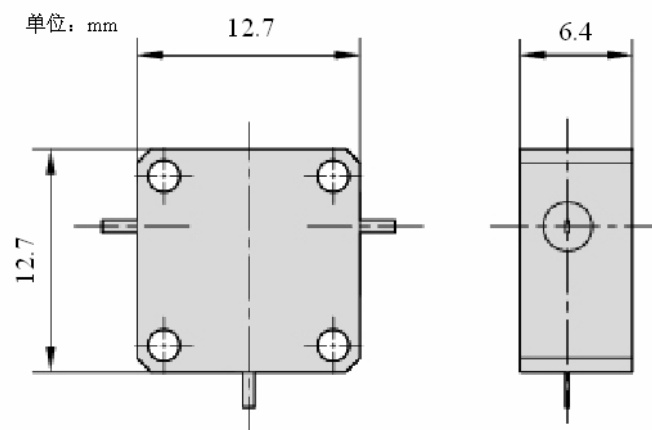

Note: All the above are technical indexes at normal temperature.

Hemrercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hemrercs.com

Fax: +86-25-85569295

E-mail: sales@hemrercs.com

Stripline Circulators



Model No.	Connector Type	Frequency Range GHz	Band Width MHz	Insertion Loss dB.Max	Isolation dB.Min	VSWR Max	Operating Temp. ℃	Average Power W	Size L*W*H mm
HSC3500-5000S01CW/CCW	TAB	3.5-5	200	0.4	20	1.25	-30~70	20	12.7*12.7*6.4
HSC3500-6500S01CW/CCW	TAB	3.5-6.5	300	0.3	23	1.20	-40~75	20	16*22*10.5
			600	0.4	20	1.20			
HSC4400-8000S01CW/CCW	TAB	4.4-8	600	0.5	20	1.25	-40~75	10	12.7*12.7*6
HSC4400-8000S02 W/CCW	TAB	4.4-8	300	0.4	23	1.20	-40~75	10	12.7*17*6
			600	0.5	20	1.25			
HSC7000-18000S01CW/CCW	TAB	7-18	300	0.3	23	1.20	-40~75	10	12.7*17*8
			1000	0.4	20	1.20			
HSC8000-18000S01CW/CCW	TAB	8-18	300	0.3	23	1.20	-40~75	10	8.9*12.5*7.8
			1000	0.4	20	1.25			

Note: All the above are technical indexes at normal temperature.

Hemreracs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hemreracs.com

Fax: +86-25-85569295

E-mail: sales@hemreracs.com