


Typical Model No.	HHWC5800-6400-02CW/CCW
Frequency Range	5.8GHz~ 6.4GHz
Band Width	FULL
Isolation	20 dB.Min
Insertion Loss	0.3 dB.Max
VSWR	1.20 Max
Waveguide Type	WR137
Operating Temperature	- 40 °C to 80 °C
Average Power	200 Watt
Size L*W*H	82*80*49.2 mm

Physical Dimensions

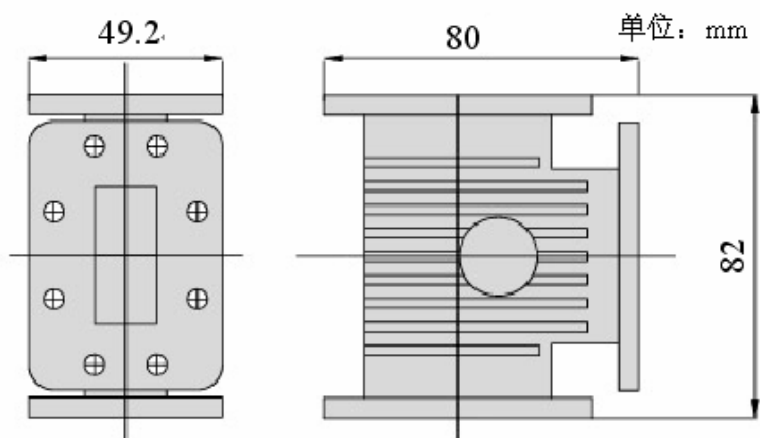

Note: All the above are technical indexes at normal temperature.

Hemrercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hemrercs.com

Fax: +86-25-85569295

E-mail: sales@hemrercs.com

Model No.	Frequency Range GHz	Band Width MHz	Isolation dB.Min	Insertion Loss dB.Max	VSWR Max	Oper. Temp. ℃	Average Power W	Waveguide Type	Size L*W*H mm
HHWC5800-6400-01CW/CCW	5.8-6.4	full	20	0.3	1.20	-40~80	200	WR137	68.3*80*49.2
HHWC5800-6400-02CW/CCW	5.8-6.4	full	20	0.3	1.20	-40~80	200	WR137	82*80*49.2
HHWC7800-8400-01CW/CCW	7.8-8.4	full	23	0.4	1.25	-55~85	350	WR112	60*65*47.8
HHWC9400-9800-01CW/CCW	9.4-9.8	full	40	0.4	1.15	-40~80	150	WR90	36*90*33

Note: All the above are technical indexes at normal temperature.

Hemrercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com