


Typical Model No.		HIWC10700-12800-01CW/CCW
Connector Type		SMA
Frequency Range		10.7GHz~ 12.8GHz
Band Width		FULL
Isolation		22dB.Min
Insertion Loss		0.4 dB.Max
VSWR		1.20 Max
Waveguide Type		WR75
Size L*W*H		30.2*38*38 mm

Physical Dimensions

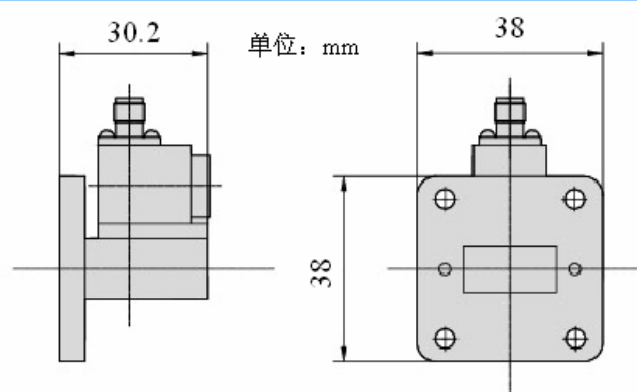

- Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com

Model No.	Connector Type	Frequency Range GHz	Band Width MHz	Isolation dB.Min	Insertion Loss dB.Max	VSWR Max	Waveguide Type	Size L*W*H mm
HIWC4400-5000-01CW/CCW	SMA	4.4-5.0	500	25	0.3	1.20	WR187	58*45*71
HIWC4400-5000-02CW/CCW	W	4.4-5.0	full	25	0.3	1.20	WR187	88.9*60*70.8
HIWC7200-8500-01CW/CCW	SMA	7.2-8.5	300	25	0.3	1.15	WR112	50*48*48
HIWC8800-9700-01CW/CCW	SMA	8.8-9.7	full	25	0.3	1.20	WR90	36*42*42
HIWC8800-9700-02CW/CCW	SMA	8.8-9.7	full	25	0.3	1.20	WR90	40*42*42
HIWC10700-12800-01CW/CCW	SMA	10.7-12.8	full	22	0.4	1.20	WR75	30.2*38*38
HIWC12700-14500-01CW/CCW	SMA	12.7-14.5	800	25	0.3	1.20	WR75	36*38*38
HIWC12400-18000-01CW/CCW	SMA	12.4-18.0	100	30	0.3	1.10	WR62	49*25*33
			500	25	0.3	1.15		
HIWC12400-18000-02 W/CCW	SMA	12.4-18.0	100	30	0.3	1.10	WR62	26*37*33
			500	25	0.3	1.15		

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com