


Typical Model No.	HLI8800-9800-01CW/CCW
Frequency Range	8.8GHz~ 9.8GHz
Band Width	FULL
Isolation	20dB.Min
Insertion Loss	0.5 dB.Max
VSWR	1.30 Max
Operating Temp.	− 30 °C to 70 °C
Average Power	5 Watt
Size L*W*H	6*7.5*3.5 mm

Physical Dimensions

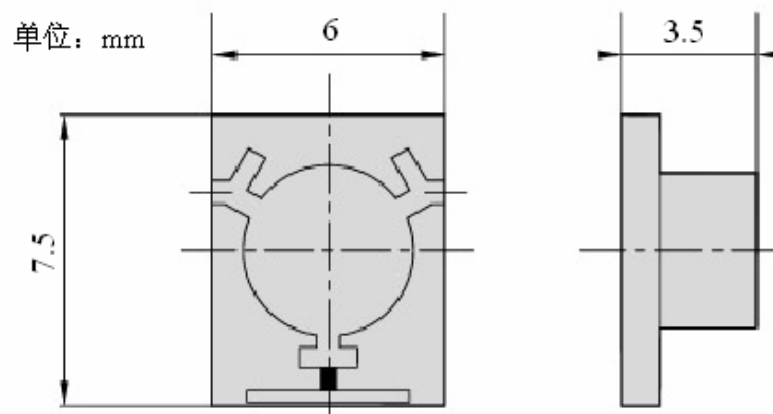

Note: All the above are technical indexes at normal temperature.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com

Substrate Type Isolators



Model No.	Frequency Range GHz	Band Width MHz	Isolation dB.Min	Insertion Loss dB.Max	VSWR Max	Oper. Temp. ℃	Average Power W	Size L*W*H mm
HLI5150-5350-01CW/CCW	5.15-5.35	full	20	0.5	1.25	-10~70	5	12*11*3
HLI5900-7100-01CW/CCW	5.9-7.1	full	16	0.6	1.40	-10~70	5	11.9*10.7*3.8
HLI8500-9500-01CW/CCW	8.5-9.5	full	20	0.5	1.25	-30~70	5	8*8*3
HLI8800-9800-01CW/CCW	8.8-9.8	full	20	0.5	1.30	-30~70	5	6*7.5*3.5
HLI10700-11700-01CW/CCW	10.7-11.7	full	23	0.5	1.25	-30~70	5	7*7*3

Note: All the above are technical indexes at normal temperature.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com