


Typical Model No.	HSC4000-8000B01CW/CCW
Connector Type	SMA
Frequency Range	4GHz~ 8GHz
Band Width	FULL
Insertion Loss	0.6 dB.Max
Isolation	18 dB.Min
VSWR	1.30 Max
Average Power	20 Watt
Operating Temp.	− 30 °C to 70 °C

Physical Dimensions

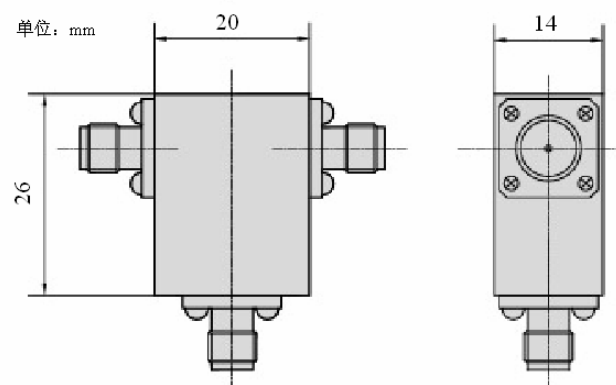

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com

Broadband Circulators



Model No.	Connector	Frequency	Band	Insertion	Isolation	VSWR	Operating	Average	Size
型号	Type	Range	Width	Loss			Temp.	Power	L*W*H
	连接	频率	带宽	插入	隔离	驻波	工作温度	平均	尺寸
	方式	范围		损耗		系数		功率	
		GHz	MHz	dB.Max	dB.Min	Max	℃	W	mm
HSC4000-8000B01CW/CCW	SMA	4-8	full	0.6	18	1.30	-30~70	20	20*26*14
HSC6000-12000B01CW/CCW	SMA	6-12	full	0.6	16	1.40	-40~75	20	16*21*13
HSC8000-12000B01CW/CCW	SMA	8-12	full	0.5	20	1.25	-40~75	10	15*19*13
HSC12000-18000B01CW/CCW	SMA	12-18	full	0.6	18	1.35	-40~75	10	15*19*13
HSC8000-18000B01CW/CCW	SMA	8-18	full	0.8	16	1.50	-40~75	10	15*21*13

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com