


Typical Model No.	HSI6000-18000B01CW/CCW
Connector Type	SMA
Frequency Range	6GHz~18GHz
Band Width	FULL
Insertion Loss	1.5 dB.Max
Isolation	12 dB.Min
VSWR	1.80 Max
Average Power	10 Watt
Operating Temp.	- 40 °C to 75 °C

Physical Dimensions

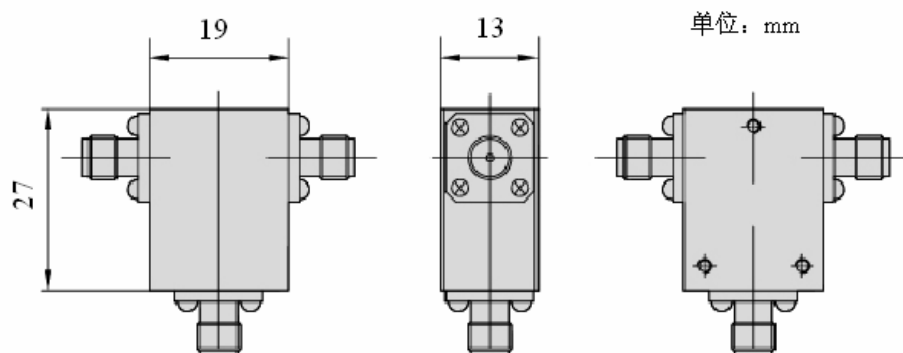

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com

Broadband Isolators



Model No.	Connector Type	Frequency	Band	Insertion	Isolation	VSWR	Operating	Average	Size
		Range	Width	Loss			Temp.	Power	L*W*H
		GHz	MHz	dB.Max	dB.Min	Max	℃	W	mm
HSI6000-12000B01CW/CCW	SMA	6-12	full	0.6	18	1.40	-40~75	10	16*26*13
HSI8000-18000B01CW/CCW	SMA	8-18	full	0.8	17	1.40	-40~75	10	15*23*13
HSI6000-18000B01CW/CCW	SMA	6-18	full	1.5	12	1.80	-40~75	10	19*27*13
HSI10000-15000B01CW/CCW	SMA	10-15	full	0.5	20	1.25	-30~70	10	12*20*13
HSI10000-15000B02CW/CCW	SMA/N	10-15	full	0.5	20	1.25	-30~70	10	12*23*19
HSI8000-12000B01CW/CCW	SMA	8-12	full	0.5	20	1.25	-30~70	10	12*20*13
HSI12000-18000B01CW/CCW	SMA	12-18	full	0.6	20	1.30	-30~70	10	12*20*13

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com