


Typical Model No.	HDI7000-18000C01CW/CCW
Connector Type	TAB
Frequency Range	7GHz~18GHz
Band Width	500MHz
Insertion Loss	0.5 dB.Max
Isolation	50 dB.Min
VSWR	1.20 Max
Reverse Power	10Watt
Operating Temp.	- 40 °C to 75 °C

Physical Dimensions

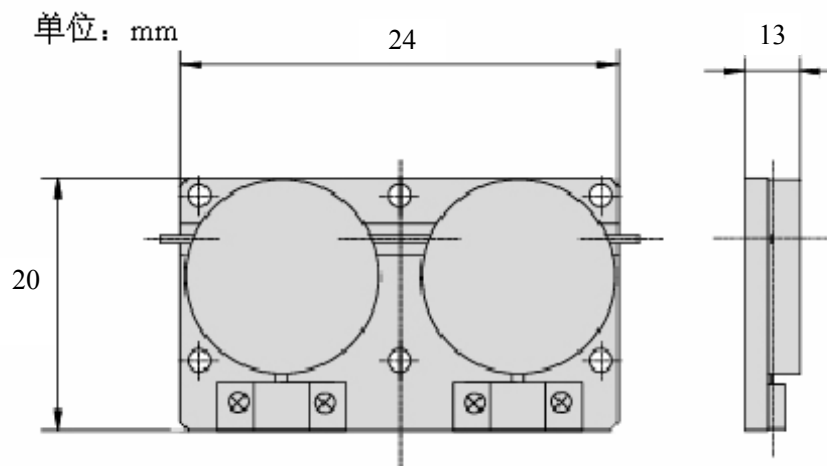

Note: All the above are technical indexes at normal temperature.

Hermerc

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist, Nanjing, Jiangsu, China, 210046

Tel: 86-25-85490880

Web Site: www.hermerc.com

Fax: +86-25-85569295

E-mail: sales@hermerc.com

Coaxial Double Isolators

Model No.	Connector Type	Frequency	Band	Insertion	Isolation	VSWR	Operating	Reverse	Size
		Range	Width	Loss			Temp.	Power	L*W*H
		GHz	MHz	dB.Max	dB.Min	Max	℃	W	mm
HDI5000-7000C01CW/CCW	SMA	5-7	300	0.6	50	1.20	-40~75	10	30*21*14
HDI7000-18000C01CW/CCW	SMA	7-18	500	0.5	50	1.20	-40~75	10	24*20*13

Note: 1, All the above are technical indexes at normal temperature;
2, Connector type can be customized.

Stripline Double Isolators

Model No.	Connector Type	Frequency	Band	Insertion	Isolation	VSWR	Operating	Reverse	Size
		Range	Width	Loss			Temp.	Power	L*W*H
		GHz	MHz	dB.Max	dB.Min	Max	℃	W	mm
HDI5000-7000S01CW/CCW	TAB	5-7	100	0.5	50	1.20	-40~75	10	22*18*8
HDI7000-18000S01CW/CCW	TAB	7-18	500	0.5	50	1.20	-40~75	5	17.8*15*7.8
HDI9000-18000S01CW/CCW	TAB	9-18	100	0.6	50	1.20	-40~75	5	13*12.7*6.8

Note: All the above are technical indexes at normal temperature.

Hermercs

Add: 2th Floor, Building 8, Jingang Pioneering Center, 108# Ganjiabian dong, Qixia Dist,
Nanjing, Jiangsu ,China, 210046

Tel: 86-25-85490880

Web Site: www.hermercs.com

Fax: +86-25-85569295

E-mail: sales@hermercs.com